

DIGITUS® CAT 6 S/FTP patch cable

DK-1644-010/WH
EAN 4016032321675



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, color white

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, color white. This cable is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a 250 MHz bandwidth and is suitable for use in structured cabling systems. The cable is made of copper (Cu) and has a length of 1 meter. The color is white. The jacket is made of LSZH (Low Smoke Zero Halogen) material. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is no. The configuration is 1:1. The connector 1 is Modular RJ45 (8/8) plug. The connector 2 is Modular RJ45 (8/8) plug. The packaging is Digital Stylus. The category is CAT 6.



- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, halogen-free, low smoke
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digital Stylus
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1 m
- Color: white
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	180	8.60	46.00	33.00	28.00	42,504.00
Packaging Unit Inside	10	0.48	8.70	25.00	30.00	6,525.00
Packaging Unit Single	1	0.05	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.04	100.00	1.20	1.30	0.00

More images:

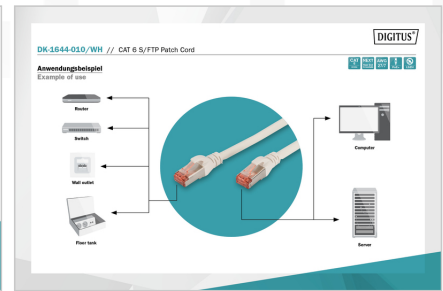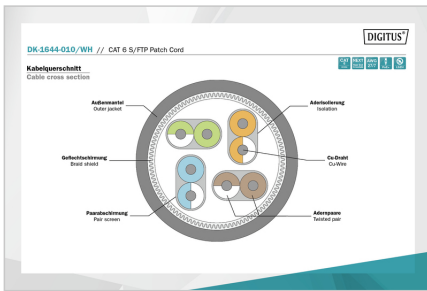

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com