

# DIGITUS® CAT 6 S/FTP patch cable

DK-1644-020/B

EAN 4016032321729



## CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 2 m, color blue

The new DIGITUS patch cable series comes onto the market with a redesigned connector. The anti-kink sleeve with locking lever protection prevents the cables from getting caught and at the same time protects the locking lever from breaking off. The plugs can be differentiated by color depending on the category: a blue plug for CAT5e, a red plug for CAT6 and a yellow plug for CAT6A. We also offer a variety of different lengths and colors to meet all requirements.

### Future-oriented standards and high-end quality for your network.

- 2x RJ45 plug (8P8C)
- Hoods with bend protection, strain relief and latching lever protection
- Length designation on the hoods
- Inner conductor: Copper (Cu)





### Attributes

- Ambalaža: DIGITUS Polybag
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 6
- Oklop: S-FTP, oklop parova u metalnoj foliji i pletenica
- Duljina: 2 m
- Boja: plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 27/7, upletena parica
- Tanka verzija: Ne
- Flat Version: Ne

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	8.00	40.00	31.00	30.00	37,200.00
Packaging Unit Inside	10	0.80	12.00	30.00	36.00	12,960.00
Packaging Unit Single	1	0.08	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.07	200.00	1.20	1.30	0.00

**More images:**

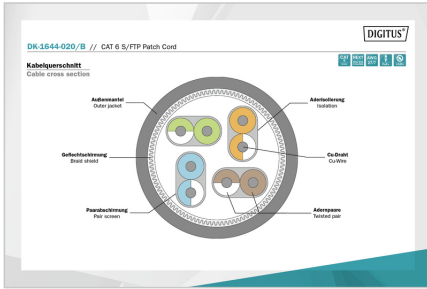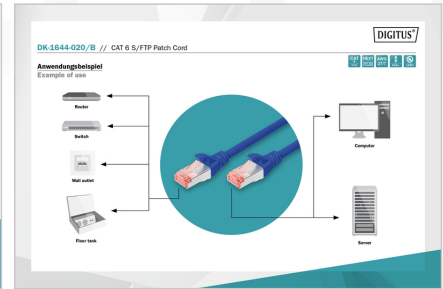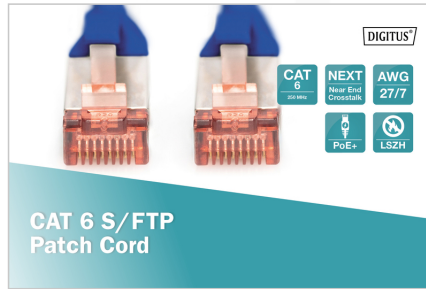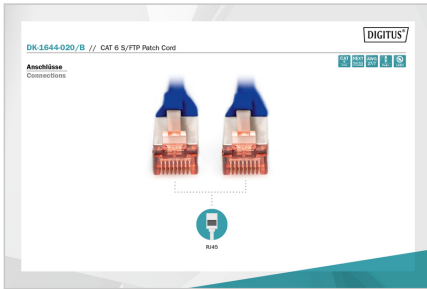

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)