

DIGITUS® CAT 6 S/FTP patch cable

DK-1644-020/R

EAN 4016032321781



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 2 m, color red

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 2 m, color red. This is a 250 MHz, shielded, LSZH patch cord with RJ45 (8P8C) connectors. It is made of copper (Cu) and has a length of 2 meters. The cable is red and has a slim version. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is no. The category is CAT 6. The shielding is S-FTP, pairs in metal foil and braid shielding. The length is 2 m. The color is red. The jacket is LSOH. The slim version is no. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is no. The configuration is 1:1. Connector 1: Modular RJ45 (8/8) plug. Connector 2: Modular RJ45 (8/8) plug. Packaging: DigiTUS Poly/Paper. Category: CAT 6.





- 2 RJ45 (8P8C)
- 250 MHz, LSZH, shielded, LSZH patch cord, length 2 m, color red
- 250 MHz, LSZH, shielded, LSZH patch cord, length 2 m, color red
- Material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DigiTUS Poly/Paper
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 2 m
- Color: red
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	12.00	40.00	40.00	25.00	40,000.00
Packaging Unit Inside	10	1.20	21.00	4.50	34.50	3,260.25
Packaging Unit Single	1	0.12	15.50	1.20	15.50	288.30
Net single without Packaging	1	0.07	200.00	1.20	1.30	0.00

More images:

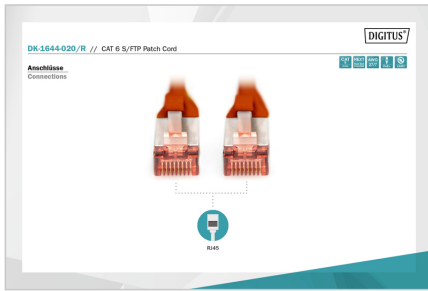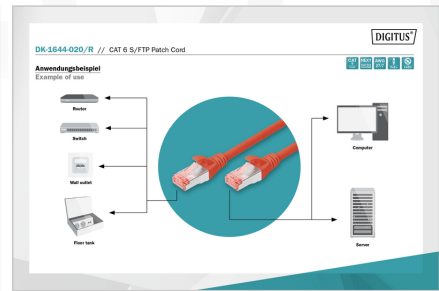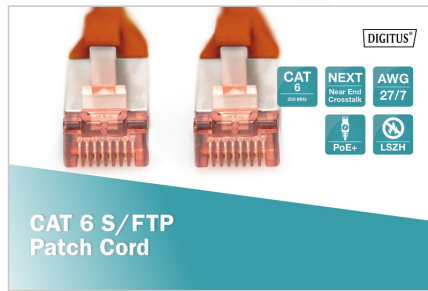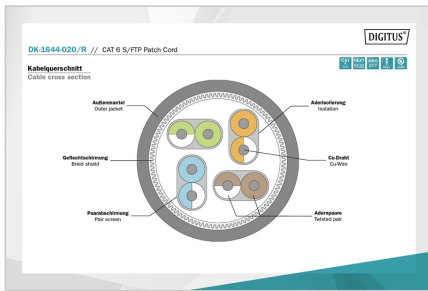

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com