

# DIGITUS® CAT 6 S/FTP patch cable

DK-1644-030/WH  
EAN 4016032321934



### CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 3 m, color white

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 3 m, color white. This cable is designed for high-speed data transmission and is compliant with ISO/IEC 11801 and TIA/EIA 568 standards. It features a 250 MHz bandwidth and is suitable for applications requiring high performance and reliability. The cable is constructed with a 4 x 2 AWG 27/7 twisted pair structure and is shielded with S-FTP technology. The connectors are modular RJ45 (8P8C) type, and the cable is packaged in a clear plastic bag.



- 2 RJ45 (8P8C)
- 250 MHz bandwidth
- LSZH jacket
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: white
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

### Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Dial IT'S Poly Bag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: white
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	9.00	33.00	33.00	29.00	31,581.00
Packaging Unit Inside	10	1.13	15.40	30.00	36.00	16,632.00
Packaging Unit Single	1	0.11	1.60	17.00	25.00	680.00
Net single without Packaging	1	0.09	300.00	1.20	1.30	0.00

**More images:**

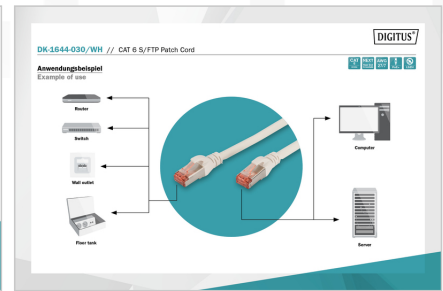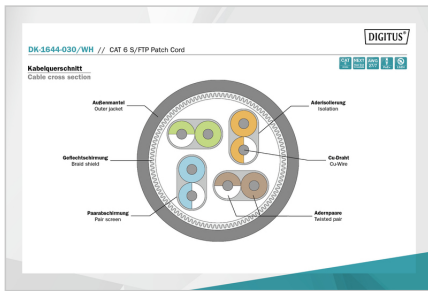

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)