


DIGITUS® CAT 6 S/FTP patch cable

DK-1644-050/B
EAN 4016032322016

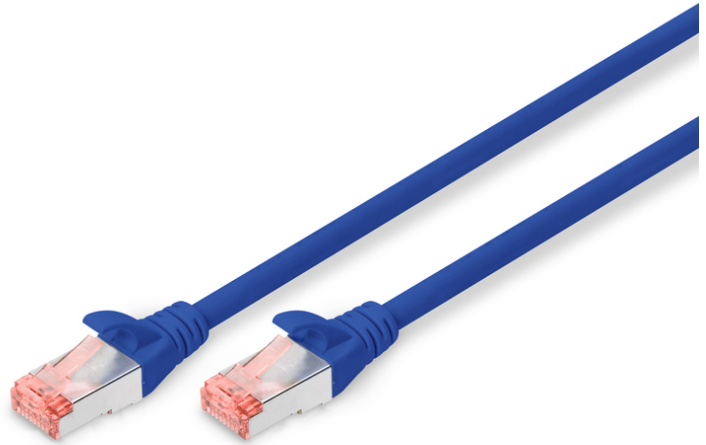

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, color blue

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, color blue. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a 250 MHz bandwidth and is suitable for use in a variety of network environments. The cable is constructed with a 4 x 2 AWG 27/7 twisted pair structure and is shielded with S-FTP technology. The connectors are made of copper and are compatible with standard RJ45 ports. The cable is made of LSZH material and is available in a length of 5 meters. The color of the cable is blue.




- 2 RJ45 (8P8C)
- LSZH material, flame retardant, halogen-free, low smoke and low toxicity
- Shielded S-FTP pairs
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digital Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 5 m
- Color: blue
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	50	8.70	38.00	29.00	26.00	28,652.00
Packaging Unit Inside	10	1.74	22.00	8.50	36.00	6,732.00
Packaging Unit Single	1	0.17	13.50	3.00	13.50	546.75
Net single without Packaging	1	0.15	500.00	1.20	1.30	0.00

More images:

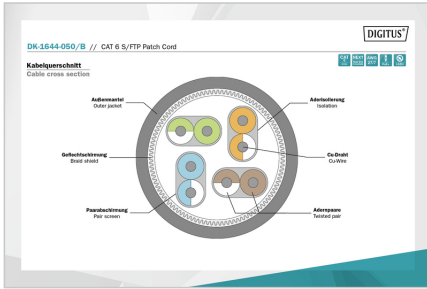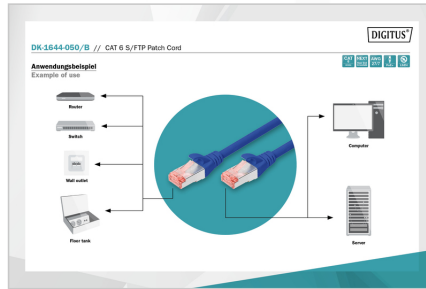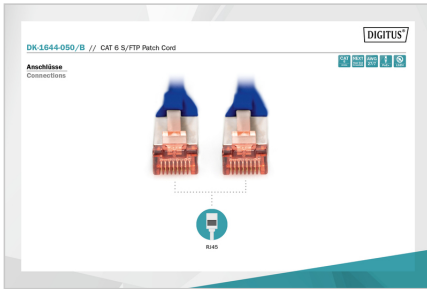

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com