


DIGITUS® Cabo de ligação USB-C - Mini-B, 1 m

DB-300130-010-S

EAN 4016032323235

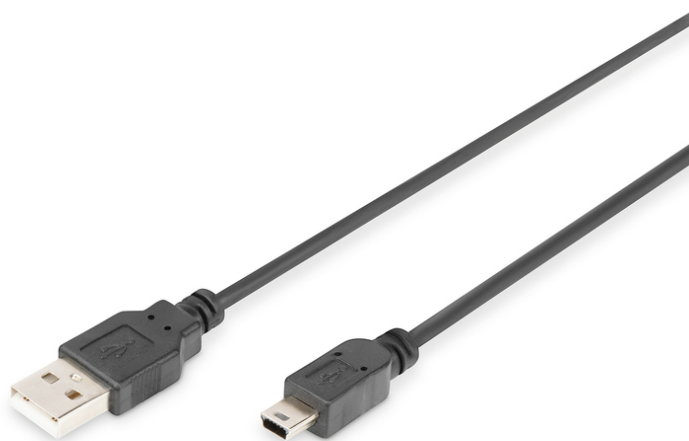

Cabo de ligação USB 2.0, tipo A - mini B (5 pinos) St/St, 1,0 m, compatível com USB 2.0, preto

Para ligar dispositivos terminais USB externos com tomada Mini B (5 pinos), por exemplo, câmaras digitais, câmaras de ação, discos rígidos externos, consolas de jogos, dispositivos de navegação e impressoras ao anfitrião USB (por exemplo, PC, computador portátil ou hub USB). Taxa de transferência até 480 Mbps (alta velocidade). Uma vez que os cabos USB DIGITUS® são compatíveis com todos os dispositivos e fabricantes comuns, este cabo pode ser utilizado universalmente. O comprimento do cabo de 1m garante uma utilização cómoda.

Os cabos USB da DIGITUS® são compatíveis com dispositivos como câmaras digitais, câmaras de ação, discos rígidos externos, consolas de jogos, dispositivos de navegação e impressoras com uma porta mini USB.

- Taxa de transferência até 480 Mbps (alta velocidade)

Attributes



- Assortment: USB Cables
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Mini USB B, 5-pin, plug
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 2.0
- Length: 1 m

Package contents

- 1 x cabo de ligação USB 2.0, tipo A para mini B

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	72	3.50	49.50	29.00	33.50	48,089.20
Packaging Unit Inside	12	0.58	27.00	25.00	16.00	10,800.00
Packaging Unit Single	1	0.05	2.30	7.50	23.50	405.38
Net single without Packaging	1	0.03	1.50	6.00	20.00	0.00

More images:

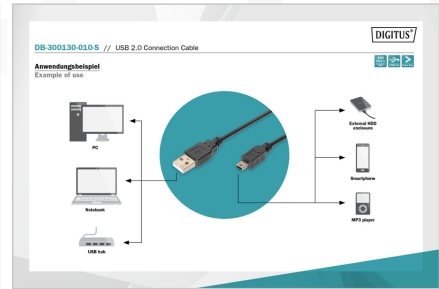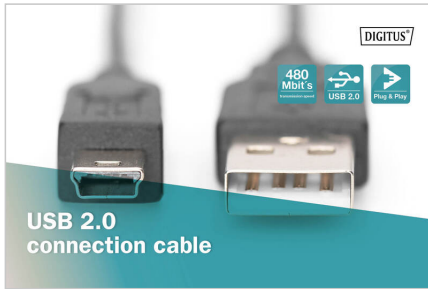

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com