


# DIGITUS® . -USB 2.0

DB-300130-010-S  
EAN 4016032323235

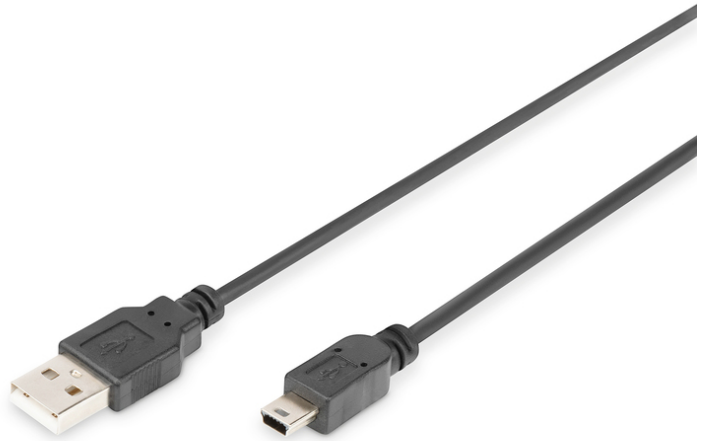

**USB 2.0 connection cable, type A - mini B (5pin) M/M, 1.0m, USB 2.0 conform, bl**

USB

- Transfer rate up to 480 Mbps (high-speed)

**Attributes**

- Assortment: USB Cables
- Color cable: black



- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Mini USB B, 5-pin plug
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 2.0
- Length: 1 m

**Package contents**

- 1 x USB 2.0 connection cable, type A to mini B

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	72	3.50	49.50	29.00	33.50	48,089.20
Packaging Unit Inside	12	0.58	27.00	25.00	16.00	10,800.00
Packaging Unit Single	1	0.05	2.30	7.50	23.50	405.38
Net single without Packaging	1	0.03	1.50	6.00	20.00	0.00

**More images:**

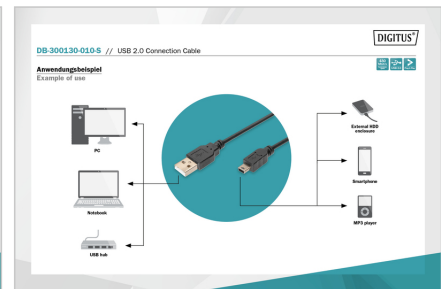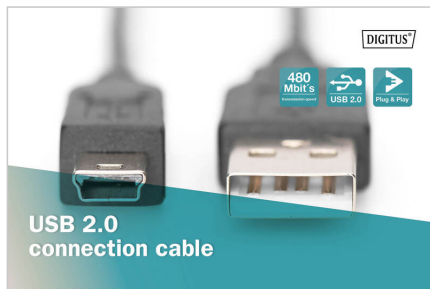



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)