

## DIGITUS® ,

AK-510100-015-S  
EAN 4016032324973



**Audio connection cable, stereo 3.5mm 1.50m, CCS, 2x0.10/10, M/M, black**

Digitus Audio Connection Cable, Stereo 3,5m CCS, 2x0.10/10, M/M, black, MP3, MP4, MP5, MP6, MP7, MP8, MP9, MP10, MP11, MP12, MP13, MP14, MP15, MP16, MP17, MP18, MP19, MP20, MP21, MP22, MP23, MP24, MP25, MP26, MP27, MP28, MP29, MP30, MP31, MP32, MP33, MP34, MP35, MP36, MP37, MP38, MP39, MP40, MP41, MP42, MP43, MP44, MP45, MP46, MP47, MP48, MP49, MP50, MP51, MP52, MP53, MP54, MP55, MP56, MP57, MP58, MP59, MP60, MP61, MP62, MP63, MP64, MP65, MP66, MP67, MP68, MP69, MP70, MP71, MP72, MP73, MP74, MP75, MP76, MP77, MP78, MP79, MP80, MP81, MP82, MP83, MP84, MP85, MP86, MP87, MP88, MP89, MP90, MP91, MP92, MP93, MP94, MP95, MP96, MP97, MP98, MP99, MP100

- 3,5mm CCS <=> 3,5mm CCS
- CCS
- CCS
- CCS



**Attributes**

- Assortment: Audio Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 3.5mm stereo plug
- Hoods: molded
- Packaging: Polybag
- Wire material: BC
- Length: 1.5 m
- Shielding: Unshielded

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	300	13.00	39.00	32.50	26.50	33,588.80
Packaging Unit Inside	5	0.22	20.00	16.00	7.00	2,240.00
Packaging Unit Single	1	0.04	12.50	3.60	1.50	67.50
Net single without Packaging	1	0.04	12.50	3.60	1.50	0.00

**More images:**

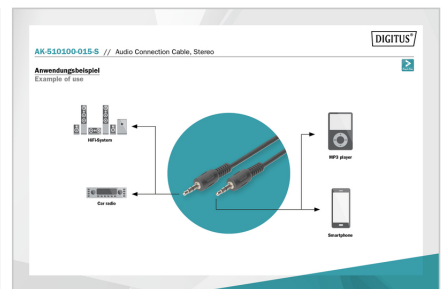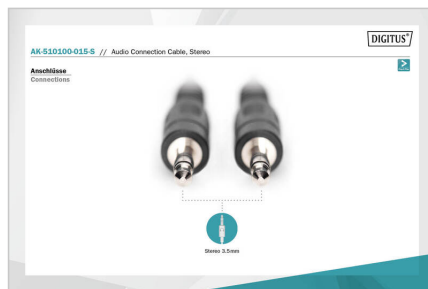



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)