


# DIGITUS® Adaptador RS 232

AK-610516-000-I

EAN 4016032325093

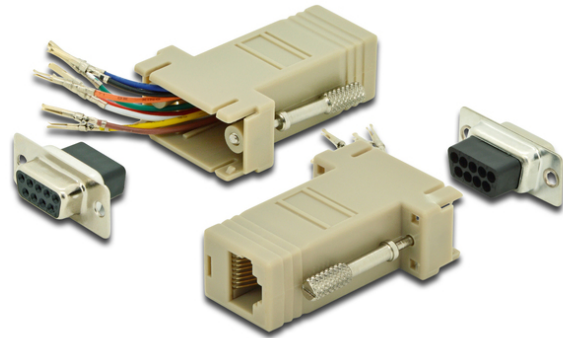

**Adaptador, DB9, RJ45, modular DB9 F, RJ45 F**

Adaptador RS 232 para RJ45 para montagem automática

**Para auto-montagem**

- DSUB9, tomada <=> RJ45, tomada
- DSUB, 9 pinos, com porcas hexagonais
- Caixa PVC, cor bege

**Attributes**

- Assortment: Serial and Parallel Adapters
- Cable type: 9-wire
- Color cable: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Hoods: plastic
- Length: 0.2 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	500	10.26	51.00	32.00	31.00	50,592.00
Packaging Unit Inside	10	0.21	3.00	16.00	21.00	1,008.00
Packaging Unit Single	1	0.02	2.50	9.50	4.00	95.00
Net single without Packaging	1	0.01	5.00	3.30	1.10	0.00

**More images:**



**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)