
# DIGITUS® □□□□□□□□□□ RS 232

**AK-610517-000-I**

**EAN 4016032325109**

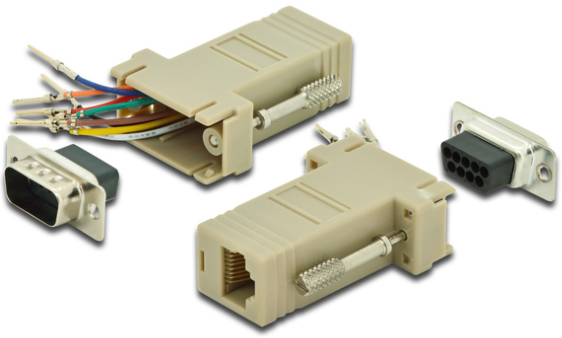

**Adaptor, DB9, RJ45, Modular DB9 M, RJ45 F**

RS 232 to RJ45 adapter for self assembling

**For selfassembling**

- DSUB, 9-□□□□□□□□□□□ □□□□□□□, □ □□□□□□□□-□□□□□□□□□□□□□□□□□□

**Attributes**


- Assortment: Serial and Parallel Adapters
- Cable type: 9-wire
- Color cable: beige
- Connector 1: DSUB, 9-pin, plug
- Hoods: plastic
- Length: 0.2 m

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 500 | 10.31 | 45.00 | 35.00 | 35.00 | 55,125.00 |
| **Packaging Unit Inside** | 10 | 0.21 | 40.00 | 32.00 | 8.00 | 10,240.00 |
| **Packaging Unit Single** | 1 | 0.02 | 19.00 | 10.00 | 1.00 | 190.00 |
| **Net single without Packaging** | 1 | 0.00 | 9.00 | 3.50 | 1.50 | 0.00 |

**More images:**





**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.

- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com