DIGITUS® CAT 6A S/FTP Patch Cable, 3 m, Gray

DK-1644-A-030

EAN 4016032327424



CAT 6A S-FTP patch cord, Cu, LSZH AWG 26/7, length 3 m, color grey

The new DIGITUS patch cable series is being launched with a redesigned connector. The kink-resistant sleeve with latch protection prevents the cables from getting snagged and also protects the latch from breaking off. The connectors are color-coded by category: a blue connector for CAT5e, a red connector for CAT6, and a yellow connector for CAT6A. We also offer a wide variety of lengths and colors to meet every need.

Future-oriented standards and high-end quality for your network.

- 2 RJ45 connectors (8P8C)
- Covers with kink protection, strain relief, and latch protection
- Length markings on the hoods
- Inner conductor: Copper (Cu)

Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no


Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	9.60	38.00	29.00	29.00	31,958.00
Packaging Unit Inside	1	0.12	30.00	36.00	10.00	10,800.00
Packaging Unit Single	1	0.12	1.80	17.00	25.00	765.00
Net single without Packaging	1	0.10	300.00	1.20	1.30	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:



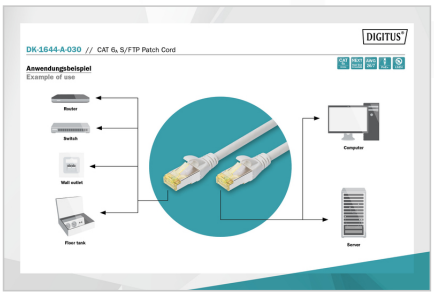

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com