

DIGITUS® Cabo de ligação CAT 6A S/FTP

DK-1644-A-030

EAN 4016032327424



Cabo de ligação CAT 6A S-FTP, cobre, LSZH AWG 26/7, comprimento 3 m, cor cinzenta

A nova série de cabos de ligação DIGITUS chega ao mercado com um conector redesenhado. A manga anti-torção com proteção da alavanca de bloqueio impede que os cabos fiquem presos e, ao mesmo tempo, protege a alavanca de bloqueio de se partir. As fichas podem ser diferenciadas por cores, consoante a categoria: uma ficha azul para CAT5e, uma ficha vermelha para CAT6 e uma ficha amarela para CAT6A. Oferecemos também uma variedade de comprimentos e cores diferentes para satisfazer todas as necessidades.

Padrões orientados para o futuro e qualidade de topo de gama para a sua rede.

- 2x ficha RJ45 (8P8C)
- Capotas com proteção contra dobras, alívio de tensão e proteção da alavanca de fecho
- Designação do comprimento nas capotas


- Conductor interno: Cobre (Cu)

Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	80	9.60	38.00	29.00	29.00	31,958.00
Packaging Unit Inside	1	0.12	30.00	36.00	10.00	10,800.00
Packaging Unit Single	1	0.12	1.80	17.00	25.00	765.00
Net single without Packaging	1	0.10	300.00	1.20	1.30	0.00

More images:

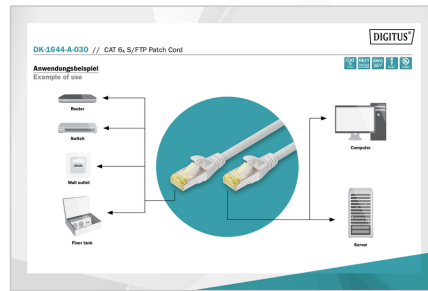

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com