

# DIGITUS® CAT 6 S/FTP patch cable

DK-1644-300

EAN 4016032328087



## CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 30 m, color grey

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 30 m, color grey. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a 250 MHz bandwidth and is suitable for applications requiring reliable and secure data transfer. The cable is constructed with a 4 x 2 AWG 27/7 twisted pair structure and is shielded with S-FTP technology. The connectors are modular RJ45 (8P8C) type, and the cable is packaged in a 15-pack carton.




- 2 RJ45 (8P8C)
- 250 MHz bandwidth, LSZH, shielded
- 4 x 2 AWG 27/7 twisted pair
- Shielding: S-FTP, pairs in metal foil and braid shielding

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: 15 pcs per carton
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 30 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

### Attributes

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 15           | 13.80       | 39.00      | 39.00      | 25.00       | 38,025.00 |
| Packaging Unit Inside        | 1            | 0.92        | 4.60       | 28.00      | 39.00       | 5,023.20  |
| Packaging Unit Single        | 1            | 0.92        | 4.60       | 28.00      | 39.00       | 5,023.20  |
| Net single without Packaging | 1            | 0.86        | 3,000.00   | 1.20       | 1.30        | 0.00      |

**More images:**

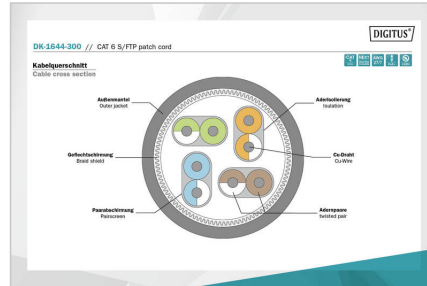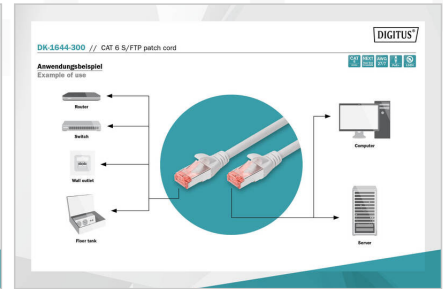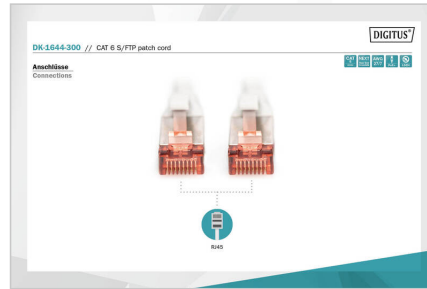

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)