

# DIGITUS® Cabo de ligação DisplayPort

AK-340103-030-S

EAN 4016032328513



**Cabo de ligação DisplayPort, tipo DP St/St, 3.0m, c/ bloqueio, Full HD, DP 1.1a conf.,pb**

Este cabo áudio/vídeo digital HD de elevado desempenho é utilizado para ligar PCs ou computadores portáteis a monitores com uma interface DisplayPort.

**Ideal para CAD/CAM, GIS, desenvolvimento 3D, simulação em tempo real e muito mais.**


- Resolução de vídeo Full HD até 1080p
- Modos de transmissão suportados: RBR, HBR, HBR2
- Largura de banda máxima: 10,8 Gbps
- Versão HBR/modo de transferência: HBR1 (2,70 Gbit/s por via)
- Versão HDCP: HDCP 1.3

**Attributes**

- Assortment: DisplayPort Cables
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Resolution max.: 1920 x 1080 Pixel, 60Hz
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	50	8.30	22.00	31.00	55.00	37,510.00
Packaging Unit Inside	10	1.66	7.00	31.00	35.00	7,595.00
Packaging Unit Single	1	0.17	20.00	14.00	3.00	840.00
Net single without Packaging	1	0.17	20.00	14.00	3.00	0.00

**More images:**

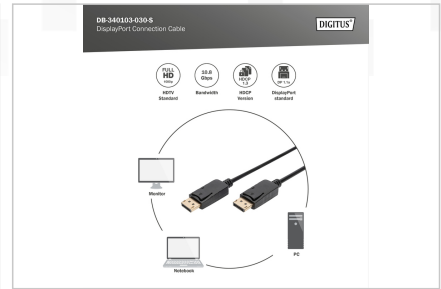

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)