

# DIGITUS DisplayPort adapter cable

**AK-340306-020-S**  
**EAN 4016032328537**



## DisplayPort Adapter Cable, Type DP-DVI (24+1) M/M, 2.0m, w/interlock, DP 1.1a comp., bl

This digital HD cable converts DisplayPort signals into DVI signals and is ideal for connecting devices with a DisplayPort interface to an HD-compatible TV, projector or monitor with a DVI interface.

### Connect a DVI-capable monitor to a DisplayPort video card/source

- Supports up to 1080p with 60 Hz
- Copper cores, foil and braid shielded for robustness and a reliable connection
- Plug and play, no additional driver required
- Supported transmission modes: RBR, HBR, HBR2
- Maximum bandwidth: 10.8 Gbps
- HBR version/transfer mode: HBR1 (2.70 Gbit/s per lane)
- HDCP version: HDCP 1.3

- OFC solid copper cable (99.9 % oxygen-free)


### Attributes

- Assortment: DisplayPort Cables
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Length: 2 m
- AOC - Active Optical Cable: no

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	6.50	28.00	34.00	45.00	42,840.00
Packaging Unit Inside	5	0.65	22.00	15.00	2.00	660.00
Packaging Unit Single	1	0.13	22.00	15.00	2.00	660.00
Net single without Packaging	1	0.13	22.00	15.00	2.00	0.00

## More images:

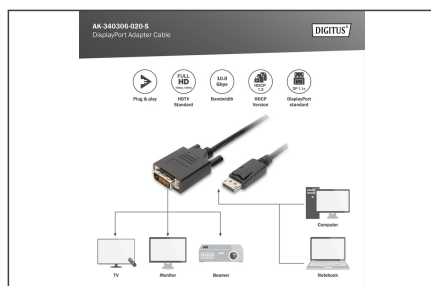

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)