

# DIGITUS® DisplayPort - DVI Adapter / Converter

AK-340409-001-S

EAN 4016032328575



## DisplayPort Adapter Cable, Type DP - DVI (24+5) M/F, 0.15m,w/interlock, DP 1.1a , bl

This digital HD adapter / converter suits for example ideal to connect a notebook or computer with DP interface to a DVI monitor, beamer, LCD/TFT monitor with a DVI cable.

### Ensures a lower burden of the interface.

- Support up to 1080p with 60Hz
- Full HD, Dual-Link
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

### Attributes


- Asortiman: DisplayPort kabele

- AWG: 32
- Blokiranje: Zatvarač na kopču
- DisplayPort standard: DisplayPort 1.1a
- Feritni filter: nema
- HDTV-norma: Full HD
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DP, utikač
- Konektor 2: DVI-I, (24+5), priključak
- Konektor u boji: crni
- Površina konektora: poniklano
- rezolucija maks.: 1920 x 1080 piksela, 60 Hz
- Duljina: 0.15 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton        | 100          | 8.00        | 40.00      | 31.00      | 19.00       | 23,560.00       |
| Packaging Unit Inside        | 10           | 0.80        | 7.00       | 24.00      | 26.00       | 4,368.00        |
| Packaging Unit Single        | 1            | 0.08        | 1.00       | 16.00      | 24.00       | 384.00          |
| Net single without Packaging | 1            | 0.08        | 1.00       | 16.00      | 24.00       | 0.00            |

**More images:**

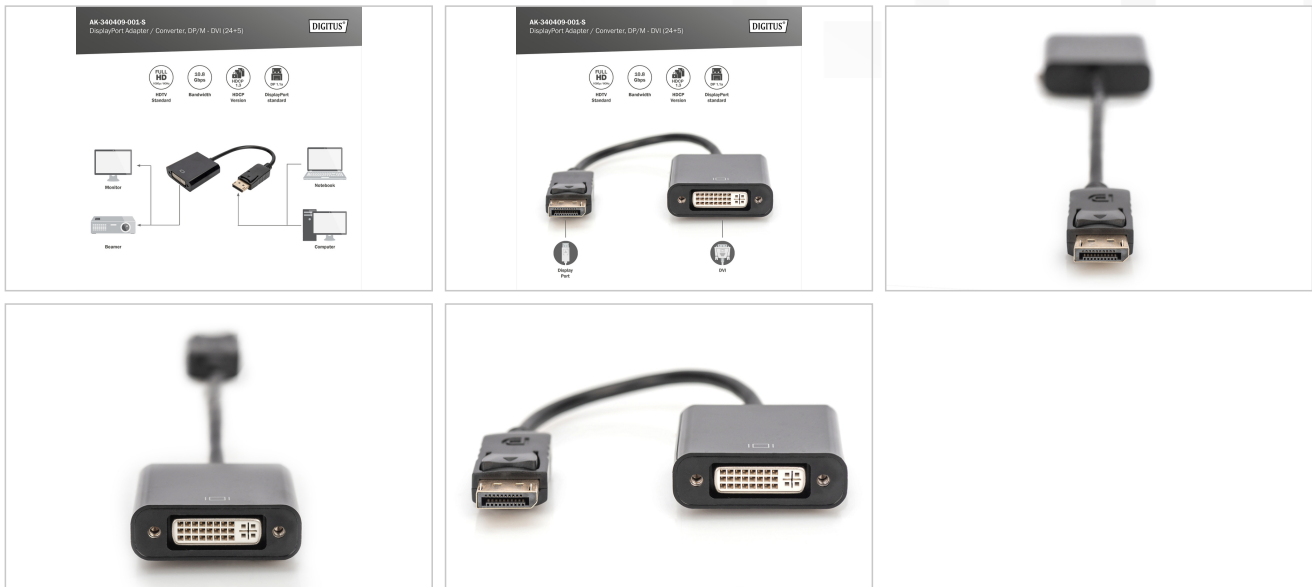

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)