


DIGITUS® Mini DisplayPort - HDMI Adapter / Converter

AK-340411-001-W

EAN 4016032328599

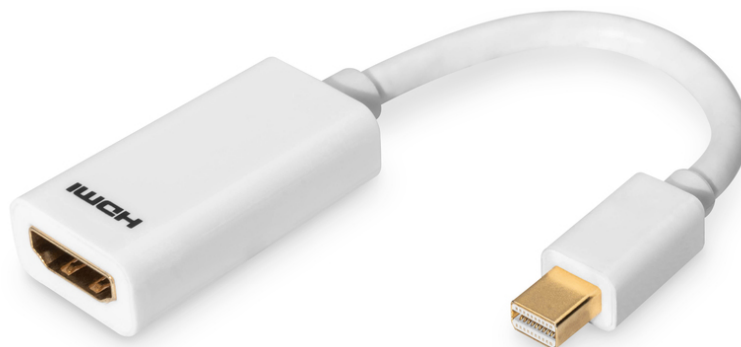

DisplayPort Adapter Cable, Type mini DP - HDMI A M/F, 0.15m, DP 1.1a, wh

This digital HD video and audio adapter / converter suits for example ideal to connect a MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac Mini® and Mac Pro® to a HDMI Monitor, beamer, LCD/TFT monitor, LED or plasma TV with a HDMI cable.

Ensures a lower burden of the interface.

- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes


- Asortiman: DisplayPort kabele

- AWG: 32
- Blokiranje: nema
- DisplayPort standard: DisplayPort 1.1a
- Feritni filter: nema
- HDTV-norma: Full HD
- Kabel u boji: bijeli
- Kapice: ukalupljeno
- Konektor 1: Mini DP, utikač
- Konektor 2: HDMI tip A, priključak
- Konektor u boji: bijeli
- Površina konektora: poniklano
- rezolucija maks.: 1920 x 1080 piksela, 60 Hz
- Duljina: 0.15 m
- AOC - aktivni optički kabel: Ne
- oklop: trostruki oklop

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	8.60	50.00	33.00	22.00	36,300.00
Packaging Unit Inside	10	0.43	1.00	16.00	24.00	384.00
Packaging Unit Single	1	0.04	1.00	16.00	24.00	384.00
Net single without Packaging	1	0.04	1.00	16.00	24.00	0.00

More images:

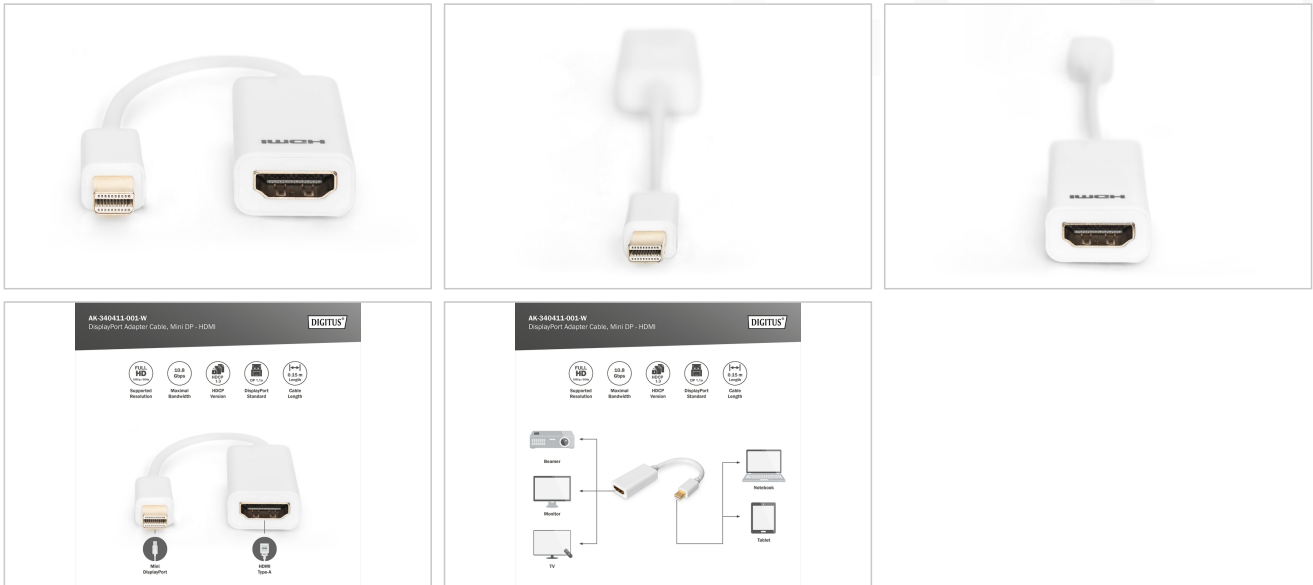

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com