

# DIGITUS® SOHO, – 5

DN-19 09-U-S-1

EAN 4016032330950



**9U wall mounting cabinet, SOHO, unmounted 460x540x400 mm, full glass front door, grey**

- IP20 protection class
- Front door: Glass door, single opening
- Side panels: Both sides
- Units: 9
- Width: 540 mm
- IP protection class: IP20

- Cabinet type: Wall mounting cabinet
- Color: light grey, RAL 7035
- Depth: 400 mm
- Front door: Glass door, single opening
- Side panels: Both sides
- Units: 9
- Width: 540 mm
- IP protection class: IP20


**Package contents**

- Installation set (screws, cage nuts, washers)
- 2x keys
- 1x quick start guide

**Attributes**

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	15.30	46.00	59.00	22.00	59,708.00
Packaging Unit Inside	1	15.30	46.00	59.00	22.00	59,708.00
Packaging Unit Single	1	15.30	46.00	59.00	22.00	59,708.00
Net single without Packaging	1	14.00	45.00	54.00	46.00	0.00

**More images:**

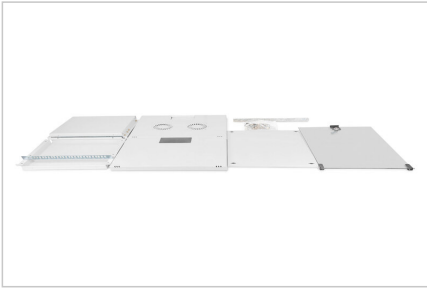

**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)