# DIGITUS® DIGITUS □□□□□□□ □□□□ □□□□□ Unique - 600 □□ x 80

**DN-19 26U-6/8-B-1**

**EAN 4016032332268**

**26U network rack, Unique 1342x600x800 mm, color black (RAL 9005)**

Сетевые шкафы DIGITUS серии Unique разработаны и изготовлены так Чтобы в них можно было устанавливать кабельные и сетевые компоне внутри шкафа и имеющими гальваническое покрытие . Профильные направляющие регулируются по глубине установки и имеют маркировк и 1000 мм. Стандартные цвета - серый (RAL 7035) и черный (RAL 9005); окрашивание в другой цвет по запросу .

Серия **DIGITUS® Unique** произведена с учетом высоких требований к решениям для ИТ 8 ı -инфраструктуры и разработана по высочайшим немецки

- Класс защиты IP20
- Замок с угловой ручкой на передней двери (подготовленной для установки замочной личинки в виде полуцилиндра )
- Угол открытия передней и задней двери – 120°
- Все двери оборудованы одной точкой запирания
- Боковые части запираются и снимаются
- В комплект входят 4 регулировочные ножки , привинченные к дну шкафа
- Профильные направляющие 483 мм (19“) установлены на передней и задней панели внутри шкафа , имеют гальваническое покрытие
- Профильные направляющие 483 мм (19“) регулируются по глубине установки и имеют маркировку высоты в монтажных единицах
- Встроенные опорные балки обеспечивают устойчивость
- Высокая жесткость рамы благодаря использованию специальной технологии гибки стали
- Крыша подготовлена для установки блоков вентиляторов
- Шкаф оснащен различными точками заземления для встроенных компонентов
- Крыша подготовлена для установки блоков вентиляторов
- Поставляется в сборе
- Cabinet type: Network cabinet
- Color: black, RAL 9005
- Front door: Glass door, single opening
- Load capacity: 1200 kg
- Rear door: Steel door and cable entry, single opening
- Side panels: Both sides
- Units: 26
- Width: 600 mm
- IP protection class: IP20
- Mounted: yes

**Package contents**

- Earthing cable set
- Installation set (screws, cage nuts, washers)
- 2 x key
- 4 x leveling foot, M10

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 1 | 70.80 | 85.00 | 65.00 | 139.20 | 769,080.00 |
| **Packaging Unit Inside** | 1 | 70.80 | 85.00 | 65.00 | 139.20 | 769,080.00 |
| **Packaging Unit Single** | 1 | 70.80 | 85.00 | 65.00 | 139.20 | 769,080.00 |
| **Net single without Packaging** | 1 | 69.80 | 80.00 | 60.00 | 134.20 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

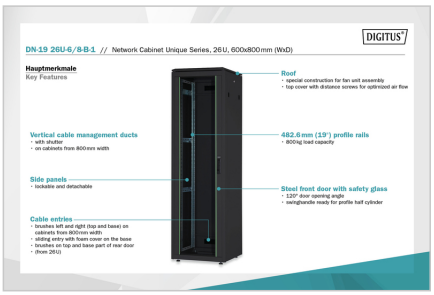


**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com