

DIGITUS® DIGITUS Unique - 600 x 800

DN-19 36U-6/8-1
EAN 4016032332312



36U network rack, Unique 1787x600x800 mm, color grey (RAL 7035)


The DIGITUS Unique 36U network cabinet is a high-quality, industrial-grade cabinet designed for housing network equipment. It features a robust steel construction and a light grey finish (RAL 7035). The cabinet is 1787 mm high, 600 mm wide, and 800 mm deep. It is designed to accommodate up to 36 units of 19-inch equipment. The front door is made of glass and provides a clear view of the equipment inside. The rear door is made of steel and features a cable entry system. The cabinet is equipped with side panels on both sides and a load capacity of 1200 kg. It is also equipped with a leveling foot for stability. The cabinet is designed to be easy to install and maintain. It is suitable for use in a variety of environments, including data centers and server rooms. The cabinet is available in a light grey color (RAL 7035) and is made of steel. It is designed to be easy to install and maintain. It is suitable for use in a variety of environments, including data centers and server rooms.

- IP protection class: IP20
- Front door: Glass door, single opening
- Rear door: Steel door and cable entry, single opening
- Side panels: Both sides
- Units: 36
- Width: 600 mm
- IP protection class: IP20
- Mounted: yes
- Package contents
 - Earthing cable set
 - Installation set (screws, cage nuts, washers)
 - 2 x key
 - 4 x leveling foot, M10

- Cabinet type: Network Cabinet
- Color: light grey, RAL 7035
- Front door: Glass door, single opening
- Load capacity: 1200 kg
- Rear door: Steel door and cable entry, single opening
- Side panels: Both sides
- Units: 36
- Width: 600 mm
- IP protection class: IP20
- Mounted: yes
- Package contents
 - Earthing cable set
 - Installation set (screws, cage nuts, washers)
 - 2 x key
 - 4 x leveling foot, M10

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	87.40	85.00	65.00	183.70	1,014,940.00
Packaging Unit Inside	1	87.40	85.00	65.00	183.70	1,014,940.00
Packaging Unit Single	1	87.40	85.00	65.00	183.70	1,014,940.00
Net single without Packaging	1	86.40	80.00	60.00	178.70	0.00

More images:

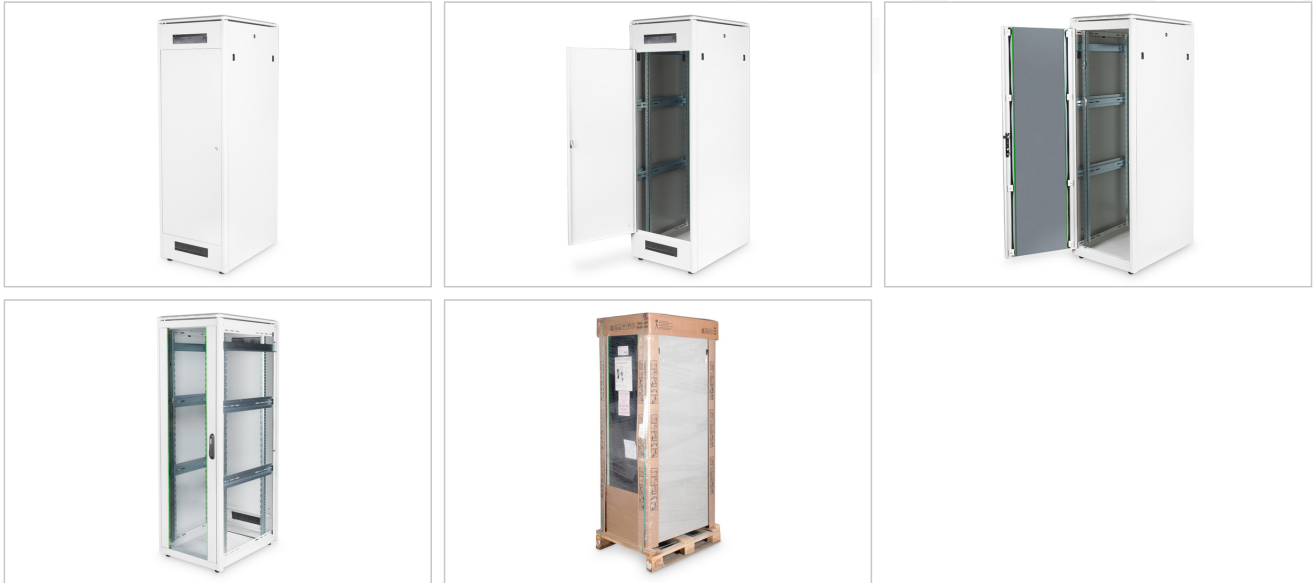

Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be neatly routed and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com