DIGITUS® Multiple socket outlet with aluminum profile and switch, 7-way socket outlet with earthing contact, 2 m supply cable with overvoltage protection and switch

DN-95407

EAN 4016032339335



1U Aluminum PDU, rackmountable, 7x safety outlet 16A Plug, 250VAC 50/60Hz, switch, surge Protection

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The socket strip can be mounted in the 19" area of the cabinet in a space-saving 1U. Overvoltage protection protects consumers from overvoltage. The integrated switch is fitted with a cover to prevent the socket strip from being switched off unintentionally.

Safe and professional power supply in the 19" range

- Overvoltage protection module against overvoltage
- Overvoltage protection : Nominal discharge current (In) - 5 kA
- Switch - secured against unintentional switch-off
- Horizontal 19" installation in the rack
- Rotation of the cans: 45°
- Housing: Aluminum profile
- Plastic components made of ABS UL-94V-0
- Input: earthing contact plug CEE 7/7, 230 Vac / 16 A
- Rated voltage: 230-250 VAC, 50/60 Hz
- Output: appliance sockets 7 x socket outlet with earthing contact DIN 49440, max. 16 A per output
- Supply cable: cable cross-section: 1.5 mm² , length: 2 m
- Dimensions: 482.6 mm (19") x 45 (1U) x 45 mm (HxWxD)

Attributes

- Dodatne mogućnosti: Prekidač za uključivanje napona, Zaštita od prenapona
- El. snaga: 3,6 kVA
- Faze: 1 fazni
- Izlazni priključci: CEE 7/3
- Struja: 16 A
- Ugrađivanje: Stalak 1U
- Ulazni utikač: CEE7/7
- Volti: 230 V
- Inčni faktor oblika (IEC 60297): 482,6 mm (19")

Package contents

- 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	10.35	28.00	25.00	52.00	36,400.00
Packaging Unit Inside	1	1.04	5.00	11.50	50.50	2,903.75
Packaging Unit Single	1	1.04	5.00	11.50	50.50	2,903.75
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:







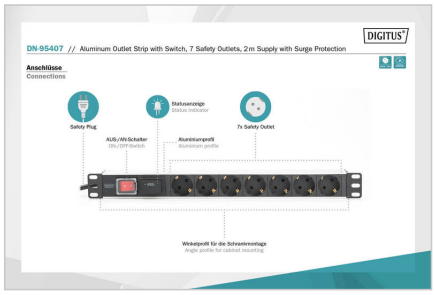

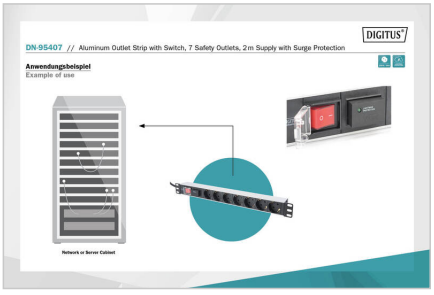



Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com