


# DIGITUS® Modular High Density Patch Panel, shielded

DN-91422

EAN 4016032343295

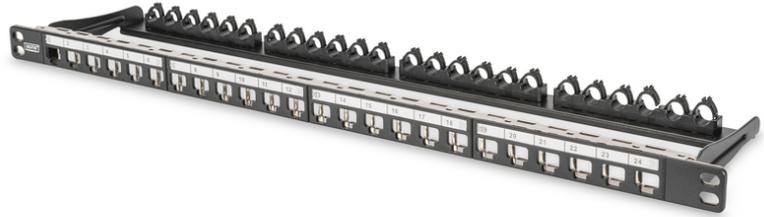

**Modular Patch Panel, shielded, 24-port label field, 0.5U, rack mount, black RAL 9005**

The DIGITUS® 24-port 0.5U patch panel offers you a high packing density. As the panel is only 0.5U high, 48 ports (2 panels with 24 ports each) can be installed on 1U.

- Keystone mount design: 2-row
- Application areas: 483 mm (19") distribution cabinet
- Standards: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for 483 mm (19") rack mounting
- Suitable for shielded Digitus® Keystone modules and connectors
- Central earthing connection
- Plastic labeling field
- Technical features:



- Housing material: 1.5 mm SPCC cold-rolled sheet steel, powder-coated
- Material standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Material earthing bar: galvanized steel
- Physical properties:
- Operating temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Color: Black RAL9005
- HE: 0.5

**Attributes**

- Boja: crna, RAL 9005
- Jedinice: 0
- Priključci: 24

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	6.30	55.00	38.00	18.00	37,620.00
Packaging Unit Inside	1	0.63	3.00	53.00	18.00	2,862.00
Packaging Unit Single	1	0.63	3.00	53.00	18.00	2,862.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

**More images:**

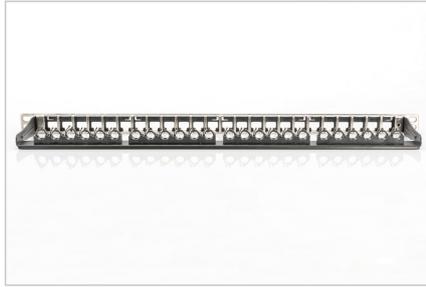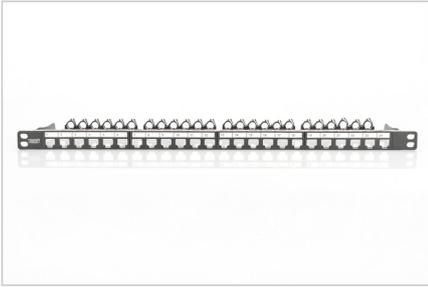

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)