

DIGITUS® CAT 6 F/UTP installation cable, 100 m, simplex, Eca

DK-1623-VH-1

EAN 4016032344056



CAT 6 F-UTP installation cable, 250 MHz Eca (EN 50575), AWG 23/1, 100 m paper box, sx, pu

The Digitus Cat 6 F/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-5-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: Aluminum foil, providing 100% coverage, drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.5 mm (Eca); 0,6 mm (Dca); 0,8 mm (Cca); 0,08 mm (B2ca)
- Outer sheath color: Purple
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C

- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 46 kg (Eca); 47 kg (Dca); 48,5 kg (Cca); 48,5 kg (B2ca)
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-250 MHz
- Capacitance: 45 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 40 dB
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „c” acc. to EN 50174-2
- NVP: 69%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6
- Oklop: F-UTP, oklop od folije
- CPR: Eca
- Duljina: 100 m
- Boja: ljubičasti
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	2	13.20	34.00	35.00	23.00	27,370.00
Packaging Unit Inside	1	6.60	33.00	34.00	11.00	12,342.00
Packaging Unit Single	1	6.60	33.00	33.00	12.00	13,068.00
Net single without Packaging	1	5.14	0.00	0.00	0.00	0.00

More images:



DIGITUS

Cat System
 B2ca: 2+1
 Cca: 3
 Dca: 3
 Eca: 3

Leistungsmerkmale (Power Features)
 + 1+
 + 3

Adaptieren der verschiedenen Modelle (Adaptability of different models)
 + 1+
 + 3



Produktbeschreibung (Product Description)
 + 1+
 + 3

Beispiel (Example)
 Cca s1a d1 a1



DIGITUS

AWG 23/1
 250 MHz
 1 Gbit Ethernet
 20+/75°
 LSZH
 Eca
 CAT 6 F/UTP Installation Cable, 100 m, Simplex, Eca

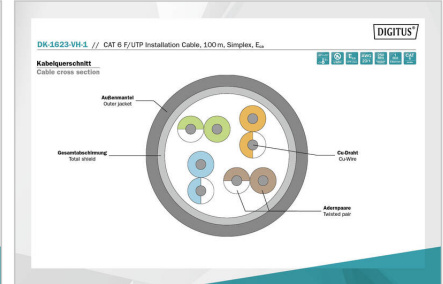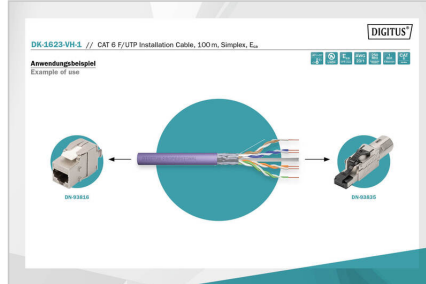

DIGITUS

Produktinformationen / Product Information	Physikalische Spezifikationen / Physical Properties
Bestellnummer / Order number: DK-1623-VH-1 Produktname / Product name: CAT 6 F/UTP Installation Cable, 100 m, Simplex, Eca Artikelnummer / Article number: 1623-VH-1	Material / Material: PVC Farbe / Color: Blau / Blue Abmessungen / Dimensions: 100 m
Technische Spezifikationen / Technical Specifications: Standard / Standard: ISO/IEC 61883 Leistungsfähigkeit / Performance: 250 MHz Übertragungsraten / Transmission rates: 1 Gbit/s	Temperaturbereich / Temperature range: -40°C bis +75°C Flammverhalten / Flamm behavior: LSZH CE-Kennzeichnung / CE marking: Eca


DIGITUS

Leistungsmerkmale / Performance Properties									
ISO/IEC 61883	ANSI/TIA 568	ISO/IEC 61883	ANSI/TIA 568	ISO/IEC 61883	ANSI/TIA 568	ISO/IEC 61883	ANSI/TIA 568	ISO/IEC 61883	ANSI/TIA 568
1	20	20	20	20	20	20	20	20	20
2	15	15	15	15	15	15	15	15	15
3	10	10	10	10	10	10	10	10	10
4	5	5	5	5	5	5	5	5	5
5	1	1	1	1	1	1	1	1	1

Intertek

ETL Verified Certificate of Conformance Number: 1615281007-010

Intertek
 15000 Seaside Drive
 Irvine, CA 92618-1697
 USA

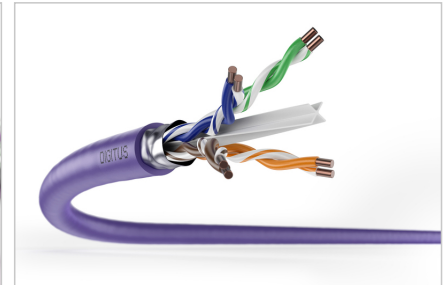

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com