

DIGITUS® CAT 6A U/FTP installation cable, 305 m, simplex, Eca

DK-1623-A-VH-305

EAN 4016032344124



CAT 6A U-FTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 305 m drum, sx, blue

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) for the assessment and verification of constancy of performance: System 3
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.5 mm (Eca); 0.6 mm (Dca); 0.8 mm (Cca); 0.8 mm (B2ca)
- Outer casing color: Light blue (RAL 5012)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C


- Operating temperature range: -20 °C to +75 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter: 7.0 mm (Eca); 7.2 mm (Dca); 7.6 mm (Cca); 7.6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @ 100-500 MHz;
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Phase delay: 450 nS/100 m max.
- Time delay: 25 nS/100 m max.
- Separation class: "c" according to EN 50174-2
- NVP: 70%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6A
- Oklop: U-FTP, parovi u metalnoj foliji
- CPR: Eca
- Duljina: 305 m
- Boja: svijetlo plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	17.15	37.00	37.00	29.00	39,701.00
Packaging Unit Inside	1	17.15	37.00	37.00	22.00	30,118.00
Packaging Unit Single	1	17.15	37.00	37.00	29.00	39,701.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

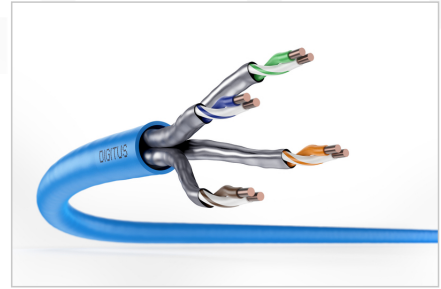

DIGITUS

AWG 23/1
500 MHz
10 Gbit Ethernet
CAT 6a
LSZH
Eca
CPL class

CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca

DIGITUS

DK-1623-A-VH-305 // CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca

Anwendungsbeispiel
Example of use

DIGITUS

DK-1623-A-VH-305 // CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca

Kabelquerschnitt
Cable cross section

DIGITUS

Produktdaten Product Information	Physikalische Spezifikationen Physical Properties
Produktname: CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca	Typ: CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca
Produktbeschreibung: CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca	Material: Polyethylene (PE) jacket, twisted pairs of copper conductors
Technische Eigenschaften Technical Properties	Mechanische Eigenschaften Mechanical Properties
Leitungsgruppen: 4 twisted pairs	Leitungsgruppenkonfiguration: 4 twisted pairs
Leitungsgruppenkonfiguration: 4 twisted pairs	Leitungsgruppenkonfiguration: 4 twisted pairs
Leitungsgruppenkonfiguration: 4 twisted pairs	Leitungsgruppenkonfiguration: 4 twisted pairs

DIGITUS

Leitungsgruppenkonfiguration: Transmission Properties

PAIRS	ATT	NEXT	PS NEXT	AKN	PS AKN	DL	SLACK	PS SLACK
1	31	66	66	66	66	66	66	66
2	31	66	66	66	66	66	66	66
3	31	66	66	66	66	66	66	66
4	31	66	66	66	66	66	66	66
5	31	66	66	66	66	66	66	66
6	31	66	66	66	66	66	66	66
7	31	66	66	66	66	66	66	66
8	31	66	66	66	66	66	66	66

Intertek

ETL Verified Certificate of Conformance Number: 19422993CF-001

Product Description: CAT 6a U/FTP Installation Cable, 305 m, Simplex, Eca

Approved by: [Signature]

GHMT

Certificate No. 1988A-21

Zertifikat No. 1988A-21

Category 6e

Category 6e

GHMT Type Approval

DIGITUS

DIGITUS

EN 50521-1

EN 50521-2

EN 50521-3

EN 50521-4

EN 50521-5

EN 50521-6

EN 50521-7

EN 50521-8

EN 50521-9

EN 50521-10

EN 50521-11

EN 50521-12

EN 50521-13

EN 50521-14

EN 50521-15

EN 50521-16

EN 50521-17

EN 50521-18

EN 50521-19

EN 50521-20

EN 50521-21

EN 50521-22

EN 50521-23

EN 50521-24

EN 50521-25

EN 50521-26

EN 50521-27

EN 50521-28

EN 50521-29

EN 50521-30

EN 50521-31

EN 50521-32

EN 50521-33

EN 50521-34

EN 50521-35

EN 50521-36

EN 50521-37

EN 50521-38

EN 50521-39

EN 50521-40

EN 50521-41

EN 50521-42

EN 50521-43

EN 50521-44

EN 50521-45

EN 50521-46

EN 50521-47

EN 50521-48

EN 50521-49

EN 50521-50

EN 50521-51

EN 50521-52

EN 50521-53

EN 50521-54

EN 50521-55

EN 50521-56

EN 50521-57

EN 50521-58

EN 50521-59

EN 50521-60

EN 50521-61

EN 50521-62

EN 50521-63

EN 50521-64

EN 50521-65

EN 50521-66

EN 50521-67

EN 50521-68

EN 50521-69

EN 50521-70

EN 50521-71

EN 50521-72

EN 50521-73

EN 50521-74

EN 50521-75

EN 50521-76

EN 50521-77

EN 50521-78

EN 50521-79

EN 50521-80

EN 50521-81

EN 50521-82

EN 50521-83

EN 50521-84

EN 50521-85

EN 50521-86

EN 50521-87

EN 50521-88

EN 50521-89

EN 50521-90

EN 50521-91

EN 50521-92

EN 50521-93

EN 50521-94

EN 50521-95

EN 50521-96

EN 50521-97

EN 50521-98

EN 50521-99

EN 50521-100

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com