

DIGITUS® DIGITUS®

DN-19 LIGHT-3
EAN 4016032361053



LED lighting, magnetic two sensor modi, incl. power adapter

Digitus® DIGITUS® LED lighting, magnetic two sensor modi, incl. power adapter. The product is designed for use in various environments and is compatible with standard power outlets. It features a long service life and low energy consumption.

- Nominal input voltage: 100-240 V
- Input frequency: 50/60 Hz
- Operating voltage: DC 12 V, 1000 mA
- Power: 3 W
- Control: IR sensor
- Detection range of the infrared sensor: 4-5 cm
- Power adapter plug: CEE 7/16 (type C) Euro plug
- LED DC input plug: 3.5 mm; 1.5 m length
- Maximum total current consumption: 250 mA @ 220-240 V
- Lum. Flow: 233 lm
- Light source: 6500K LED
- Consumption in kWh/1000 h: 0.003 kWh

- Service life in hours: 20000
- Elevation (above MSL) of the operating memory: 0-3000 m / 0-15000 ft
- Storage/operating temperature: -25 °C to +65 °C / -20 °C to +45 °C
- Non-condensing
- Aluminum housing
- Color: black plastic & grey aluminum
- CE & ROHS compliant
- Time to 60% of max. luminosity: <1 sec.

Attributes



- Inch form factor (IEC 60297): 482.6 mm (19")

Package contents

- LED light
- Power adapter
- Magnetic strip

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	5.30	24.00	32.50	34.00	26,520.00
Packaging Unit Inside	1	0.27	4.50	34.00	8.00	1,224.00
Packaging Unit Single	1	0.27	4.50	34.00	8.00	1,224.00
Net single without Packaging	1	0.16	2.90	30.00	1.00	0.00

More images:

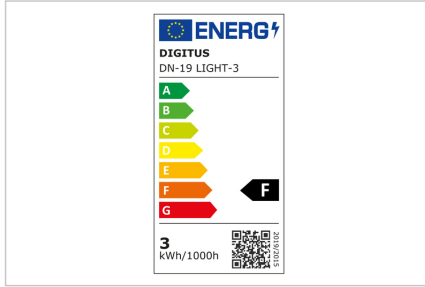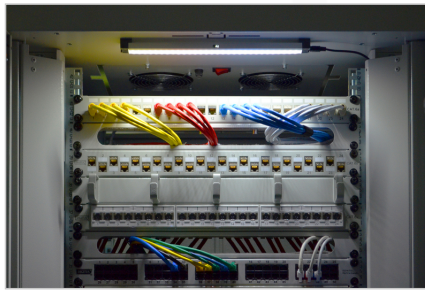

Safety notes

- When installing and using the accessory product for network cabinets, observe the respective safety instructions of the manufacturer or the cabinet system in which you want to use the accessory.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com