

DIGITUS VGA UTP Extender, Receiver Unit

DS-53450
EAN 4016032361985



VGA UTP Extender, receiver unit up to 300m range

Extends the max. length of a VGA signal up to 300 m by using a simple UTP cable between the transmitter and receiver unit.

Easy and convenient distribution for VGA signals up to 300 m - Place your displays wherever you want without VGA cable limitations.

- Cable lengths up to 300 m with CAT5 UTP cables (when using CAT5 Reach)
- Supports stereo audio extension
- High resolution possible up to 1920 x 1200 pixels
- Dimensions (L x W x H): 110 x 75 x 25 mm
- Operating temperature: 0 °C ~ 70 °C
- Operating humidity: 10 % ~ 85 % (non-condensing)

- Power input: 5 V @ 2 A, max. 5 W

Attributes


- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 5e
- Distance: 300 m
- KVM: no
- PoE (Power over Ethernet): no
- Video connection ports: VGA


Package contents

- 1 x DIGITUS® VGA UTP Extender, receiver unit
- 1x Power adapter (5 V/2 A)
- 1x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	15.10	25.50	36.50	60.00	55,845.00
Packaging Unit Inside	1	0.38	13.00	17.00	5.50	1,215.50
Packaging Unit Single	1	0.38	13.00	17.50	5.50	1,251.25
Net single without Packaging	1	0.36	7.50	11.50	2.50	0.00

More images:

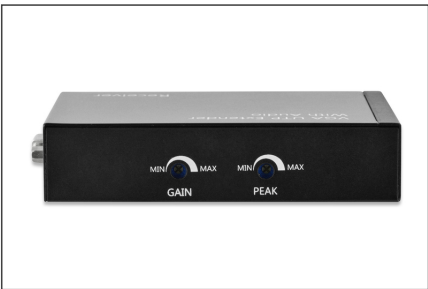

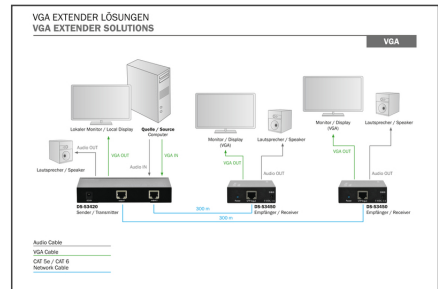

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com