

# DIGITUS® CAT 5e U/UTP data cable - installation cable, 100 m, simplex, Eca

DK-1511-V-1-1

EAN 4016032363804



## CAT 5e U-UTP installation cable, 100 MHz Eca (PVC), AWG 24/1, 100 m paper box, sx, grey

The Digitus Cat 5e U/UTP installation cable is suitable for use in structured data centers and building cabling in accordance with ISO/IEC 11801, DIN EN 50288-3-1, DIN EN 50173. The cable is excellent for the transmission of analog and digital data and supports POE. It offers reliable transmission quality for standard applications.

### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 24/1
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: None
- Overall shielding: None
- Outer sheath: Eca according to EN 50575; PVC
- Outer sheath thickness (nominal): 0.50 mm nominal
- Outer casing color: Grey (RAL 7035)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C
- Operating temperature range: -20 °C to +60 °C

- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 4.7 mm nominal
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-600 MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-earth): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 147 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Phase delay: 535 nS/100 m max.
- Time delay: 20 nS/100 m max.
- Isolation class: "b" according to EN 50174-2
- NVP: 69%

### Attributes

- Asortiman: Instalacijski kabe li s upredenim paricama
- Kategorija: CAT 5e
- Oklop: U-UTP, neoklopljeno
- CPR: Eca
- Duljina: 100 m
- Boja: sivi
- Kapica: PVC
- Struktura: 4 x 2 AWG 24/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	2.50	12.00	23.00	23.00	6,348.00
Packaging Unit Inside	1	2.50	12.00	23.00	24.00	6,624.00
Packaging Unit Single	1	2.50	12.00	23.00	223.00	61,548.00
Net single without Packaging	1	2.50	0.00	0.00	0.00	0.00

More images:



**DIGITUS**

**CPR** System  
 Brandenklasse  
 Brandverhalten  
 Brandklasse  
 Brandverhalten  
 Brandklasse

**B2ca** **Cca** **Dca** **Eca**


**1+** **3**

**s1a** **d1** **a1**

**S** **d** **a**

**Erklärung der verschiedenen Bezeichnungen:**

- S** - Feuerbeständigkeit
- d** - Rauchdichte
- a** - Abgaseigenschaften

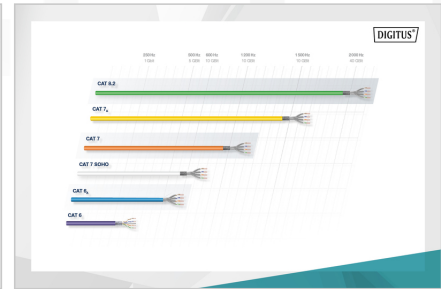

**Intertek**

**ETL** Verifies Certificate of Conformance Number: 16115261CR10014

**Intertek**

**ETL** Verifies Certificate of Conformance Number: 16115261CR10014

**ETL** Verifies Certificate of Conformance Number: 16115261CR10014

**DIGITUS**

**Leitungsparameter / Transmission Properties**



PAIRS	UTP	MMT	PM-MMT	STP	MMT	PM-MMT	STP	MMT	PM-MMT	STP
1	2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
2	4	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
4	8	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
8	16	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
16	32	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
32	64	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
64	128	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2
128	256	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2	42,2

**DIGITUS**

**Produktinformation / Product Information**

**Physikalische Spezifikationen / Physical Properties**

Parameter	Value	Parameter	Value
Hersteller	Digitus	Material	100% Kupfer
Produktname	DK-1511-V-5-1	Material	100% Kupfer
Produktbeschreibung	100m UTP Installation Cable, 100m, Simplex, Eca	Material	100% Kupfer

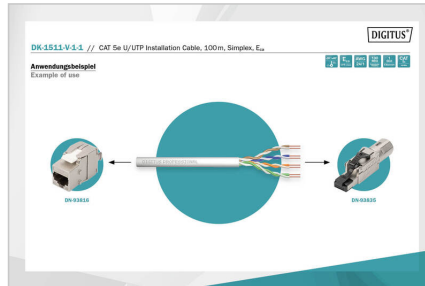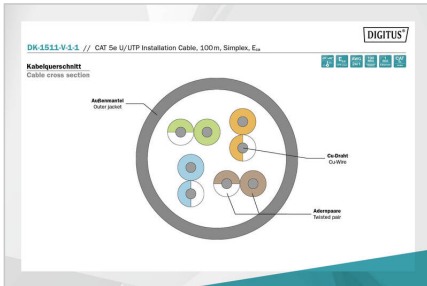

**DIGITUS**

**100 MHz**  
**1 Gbit Ethernet**  
**AWG 24/1**  
**CAT 5e**  
**20°/±60°**  
**Eca**  
**CPR class**

**CAT 5e U/UTP Installation Cable, 100 m, Simplex, Eca**



**Safety notes**

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)