


DIGITUS® CAT 7A S/FTP data cable - installation cable, 1000 m, simplex, Dca-s1a d1 a1, GHMT PVP certified

DK-1743-A-VH-10
EAN 4016032363859

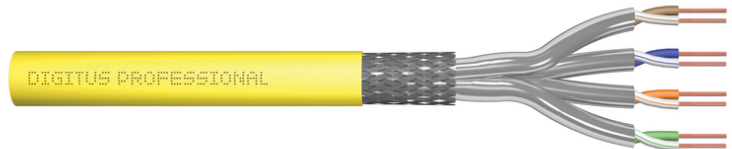

CAT 7A S-FTP installation cable, 1500 MHz Dca (EN 50575), AWG 22/1, 1000 m drum, sx, yellow

Digitus CAT 7A S-FTP installation cable, 1500 MHz Dca (EN 50575), AWG 22/1, 1000 m drum, sx, yellow

- 100% PVC jacket
- 8 conductors, 4 twisted pairs
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1000 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair
- Operating temperature: 0°C to +50°C

- Length: 1000 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	64.60	55.00	55.00	45.00	136,125.00
Packaging Unit Inside	1	64.60	53.00	53.00	43.50	122,192.00
Packaging Unit Single	1	64.60	55.00	55.00	45.00	136,125.00
Net single without Packaging	1	68.00	0.00	0.00	0.00	0.00

More images:




DIGITUS

CPR Symbol
 B2ca
 Cca
 Dca
 Eca
 Brand: Cca, s1a, d1, a1

Leistungseigenschaften (MHz)
 1+
 3

Adaptieren der verschiedenen Stecker
 1+
 3

Zusätzliche Eigenschaften
 S
 d
 a

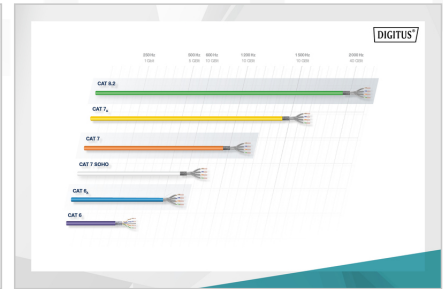

DIGITUS

Leistungseigenschaften Transmission Properties



MHz	AT	BT	PK BT	AK	PK AK	PL	EL/AT	PK EL/AT
1	15	15	15	15	15	15	15	15
10	42	18	18	18	18	18	18	18
100	144	18	18	18	18	18	18	18
1000	760	18	18	18	18	18	18	18
10000	34	18	18	18	18	18	18	18
100000	17	18	18	18	18	18	18	18
1000000	8	18	18	18	18	18	18	18
10000000	3	18	18	18	18	18	18	18

DIGITUS

Produktinformation Product Information

Elektrische Eigenschaften Electrical Properties
 Impedanz: 100 Ohm
 Kapazität: 4 pF/m
 Induktivität: 1 nH/m

Physikalische Spezifikationen Physical Properties
 Leiter: Bare Copper
 Isolierung: PVC
 Temperaturbereich: -40°C bis +75°C

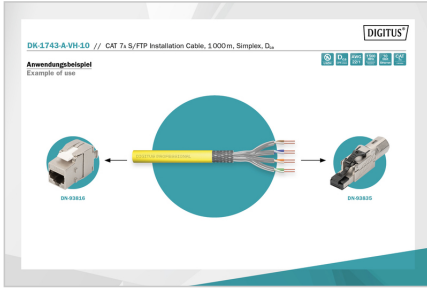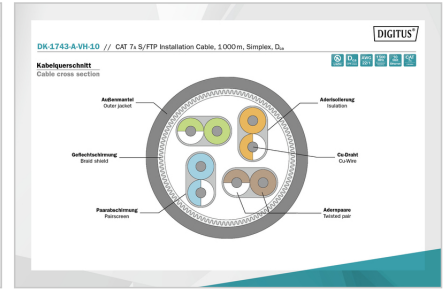

DIGITUS

CAT 7A S/FTP Installation Cable, 1000 m, Simplex, Dca

1500 MHz
 40 Gbit Ethernet
 CAT 7A
 AWG 22/1
 LSZH
 Dca
 CPR class

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com