

DIGITUS® Cabo de ligação USB-C, USB-C - USB-C

AK-300138-018-S

EAN 4016032368946



Cabo de ligação USB Tipo C, Tipo C - C St/St, 1,8m, 5V/3A 15W, 480MB, versão 2.0, bw

Para ligar dispositivos USB-C externos (por exemplo, tablet ou smartphone) ao anfitrião USB-C (por exemplo, PC, computador portátil ou concentrador USB). Taxa de transferência de dados até 480 Mbps (alta velocidade).

Para sincronização e carregamento super-rápidos

- Núcleos de cobre, folha e trança blindados para robustez e uma ligação fiável
- Taxa de transferência de dados até 5 Gb/s (SuperSpeed)
- Fonte de alimentação até 5V/3A e 15W
- Suporta a especificação USB PD (Power delivery)
- A ficha tipo C pode ser utilizada em ambos os lados


Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1.8 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	250	5.00	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.20	30.00	20.00	1.40	840.00
Packaging Unit Single	1	0.02	9.00	9.00	0.62	50.22
Net single without Packaging	1	0.02	9.00	9.00	0.60	0.00

More images:

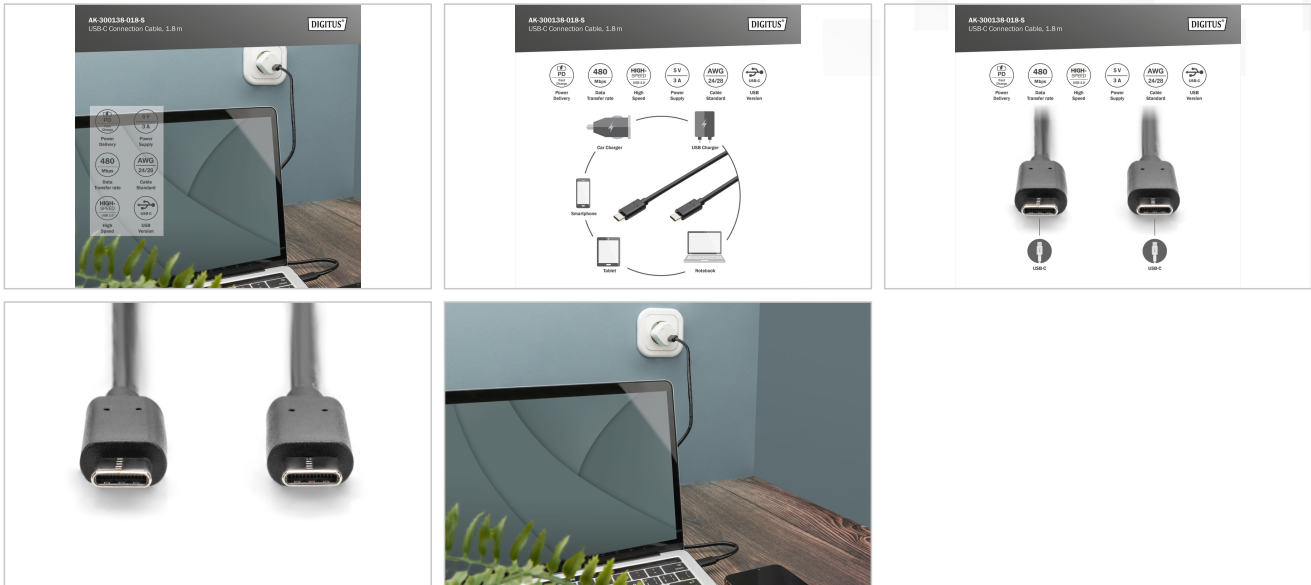

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com