


# DIGITUS® Módulo mini GBIC (SFP) compatível com a Cisco, 1,25 Gbps, 0,55 km

DN-81000-02

EAN 4016032369943

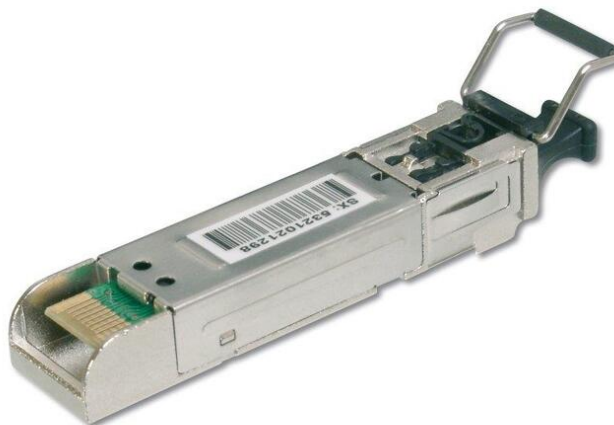

## Módulo SFP de 1,25 Gbps, multimodo, compatível com a Cisco Conector LC duplex, 850nm, até 550m, Cisco

Os módulos transceptores DIGITUS® Mini GBIC (SFP) oferecem a mais elevada qualidade e fiabilidade. Quer seja de comutador para comutador, conversor para comutador, conversor para conversor ou outras possibilidades de aplicação alargadas: A grande variedade de módulos DIGITUS® permite-lhe utilizar a tecnologia de fibra ótica de forma flexível. A conformidade com a norma MSA (Multi Source Agreement) assegura a compatibilidade com fabricantes terceiros.

### A ligação de fibra ótica "plug and play"

- Compatível com Cisco
- Módulo Mini GBIC SFP (Small Form Fator Pluggable)
- Alta qualidade e máxima fiabilidade
- Débito máximo de dados de 1,25 Gbps
- Em conformidade com a norma IEEE 802.3z Gigabit
- Produto laser de classe 1 de acordo com a norma EN 60825-1
- Fácil instalação plug and play
- Compatível com MSA (Multi Source Agreement)
- Ligável a quente
- Ligação: 1x LC Duplex
- 1000Base-SX - Para distâncias curtas
- Comprimento de onda: 850nm
- Potência de transmissão: mínimo -8 dBm, máximo -3 dBm

- Sensibilidade de receção: Mínimo -20 dBm
- Para uma distância de até 0,55 km
- Adequado para cabos de fibra ótica multimodo 50/125µm e 62,5/125µm
- Mecanismo seguro de libertação rápida
- Temperatura de funcionamento: 0 °C ~ 70 °C
- Compatível com os seguintes fabricantes: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE

### Attributes

- Mode: Multimode
- Connector: LC
- Distance (km): 0.5
- Wavelength: 850 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Cisco, Universal (MSA)
- Ethernet speed: Gigabit

### Package contents

- Módulo SFP

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.10	11.80	9.00	329.22
Net single without Packaging	1	0.02	1.00	5.90	0.80	0.00

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)