
DIGITUS® HP-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81001-01

EAN 4016032369967

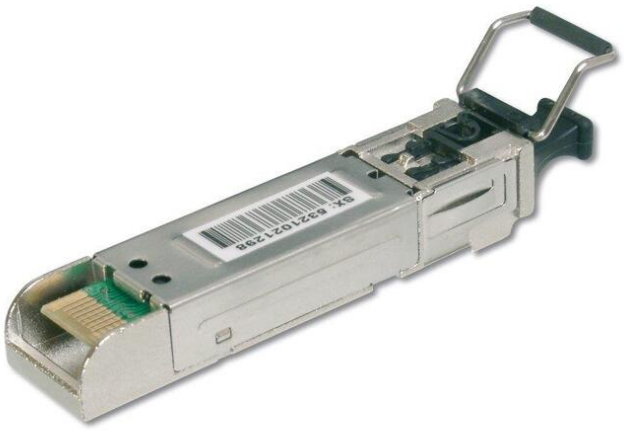

1.25 Gbps SFP Module, Singlemode, HP-compatible LC Duplex Connector, 1310nm, up to 20km, HP Aruba

□□□□□□□ □□□□□□□□□□□□□ DIGITUS® Mini GBIC (SFP) □□□□□□□□□□□□□□□ □□□□□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□, □□□□□ □□ □□□□□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□□, □ Source Agreement) □□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□ □ □ □□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□.

□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□ Plug and Play

- HP-□□□□□□□□□□□□□
- □□□□□□□□□□□ □ HP-Aruba
- □□□□□□□ Mini GBIC SFP (□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□)
- □□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□
- □□□□□□□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□ □□□□□□□ 1,25 □□□□□/□
- □□□□□□□□□□□□□□□□ □□□□□□□□□□□□□ □□□□□□□□□□□ IEEE 802.3z
- □□□□□□ 1 □□□□□□□□□□ □□□□□□□□□ □□ EN 60825-1
- □□□□□□□□ □□□□□□□□□□□ Plug and Play
- □□□□□□□□□□□ □□ □□□□□□□□□□□□ MSA (□□□□□□□□ □□□□□□□□□□□□)
- □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□ □□□□□□□
- □□□□ □□□□□□□□□□□□□□: 1 □□□□□□□□□ LC
- 1000Base-LX - □□□□ □□□□□□□□□ □□□□□□
- □□□□□□ □□□□□□: 1310 □□

- □□□□□□□□□□ □□□□□□□□□□□□□□: □□□□□□□□ — 8 □□□□, □□□□□□□□□□ — 3 □□□□
- □□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□: □□□□□□□□□ — 24 □□□□
- □□□□ □□□□□□□□□□□ □□□ 20 □□□
- □□□□□□□□□□ □□□□ □□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□ □□□□□□□ 09/125µ□
- □□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□
- □□□□□□□□□□□□□□□□ 3,3 □
- □□□□□□□□ □□□□□□□□□□□□□□: 0-70 °C

Attributes

- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: HP, Universal (MSA)
- Ethernet speed: Gigabit

Package contents

- □□□□□□□ SFP

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	5.80	54.50	37.50	21.00	42,918.80
Packaging Unit Inside	1	0.06	11.50	9.50	3.00	327.75
Packaging Unit Single	1	0.06	11.50	9.50	3.00	327.75
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against

harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com