DIGITUS® HP-compatible SFP+ 10G SM 1310nm 10km with DDM

DN-81201-01

EAN 4016032370031



10G SFP+ Module, Singlemode, DDM, HP-compatible LC Duplex Connector, 1310nm, up to 10km, HP

□□□□□□□ □□□□□□□□□□□□□ DIGITUS® Mini GBIC (SFP) □□□□□□□□□□□□□□□ □□□□□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□□, □□□□□ □□ □□□□□□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□, □ Source Agreement) □□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□ □ □ □□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□ Plug and Play

- □□□□□□□ Mini GBIC SFP (□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□)
- □□□□□□□□□□□□□□□ DDM (Digital Diagnostic Monitoring)
- □□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- □□□□□□ 1 □□□□□□□□□□ □□□□□□□□ □□ EN 60825-1
- □□□□□□□□□ □□□□□□□□□□□ Plug and Play
- □□□□□□□□□□□ □□ □□□□□□□□□□□□ MSA (□□□□□□□□ □□□□□□□□□□□□)
- □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□ □□□□□□□
- □□□□ □□□□□□□□□□□□□□: 1 □□□□□□□□□ LC
- □□□□□□ □□□□□□: 1310 □□

- □□□□□□□□□ □□□□□□□□□□□□□□: □□ □□□□□□ -8 □□□□, □□□□□. -0,5 □□□□
- □□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□, □□ □□□□□□ -12.5 □□□□
- □□□□ □□□□□□□□□□□□□ □□□ 10 □□
- □□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□
- □□□□□□□□ □□□□□□□□□□□□□□□□: 0-70 °C

Attributes

- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1310 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: HP
- Ethernet speed: 10 Gigabit


Package contents

- □□□□□□□ SFP

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.03	5.50	1.20	0.80	0.00

More images:

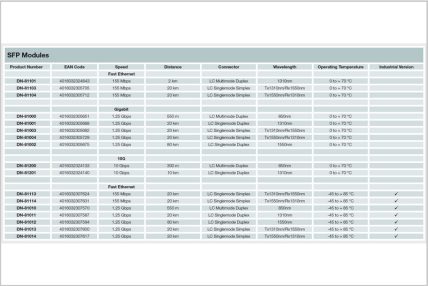





Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com