

DIGITUS® Caixa de distribuição FTTH para utilização no exterior - 24 acopladores LC/duplex ou 24 acopladores SC/simplex

DN-968911

EAN 4016032370987



Caixa de distribuição FTTH exterior para 24 adaptadores SC SX ou LC/DX e 24 uniões



A caixa FTTH é adequada para instalação no exterior. Um suporte interno para acopladores 24x LC (DX) ou SC (SX) é utilizado para a distribuição de fibra ótica. Um tabuleiro de comprimento excessivo para pigtaills e várias entradas de cabos garantem as melhores opções de cablagem possíveis.


- Dimensões do produto: 90 x 254 x 322 mm

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	1.45	3.50	29.00	11.00	1,116.50
Packaging Unit Inside	1	1.45	34.00	29.00	11.00	10,846.00
Packaging Unit Single	1	1.45	34.00	29.00	11.00	10,846.00
Net single without Packaging	1	1.20	32.20	25.40	9.00	0.00

More images:

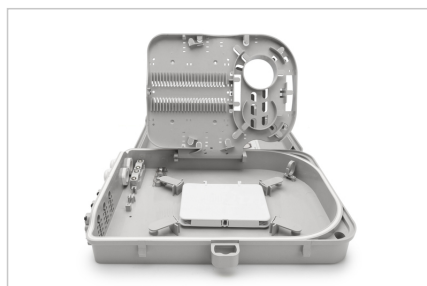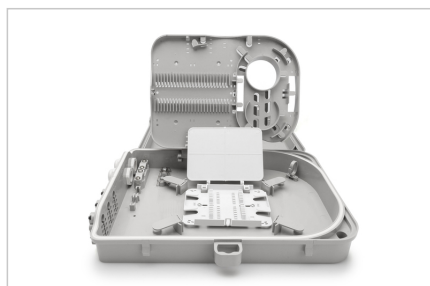

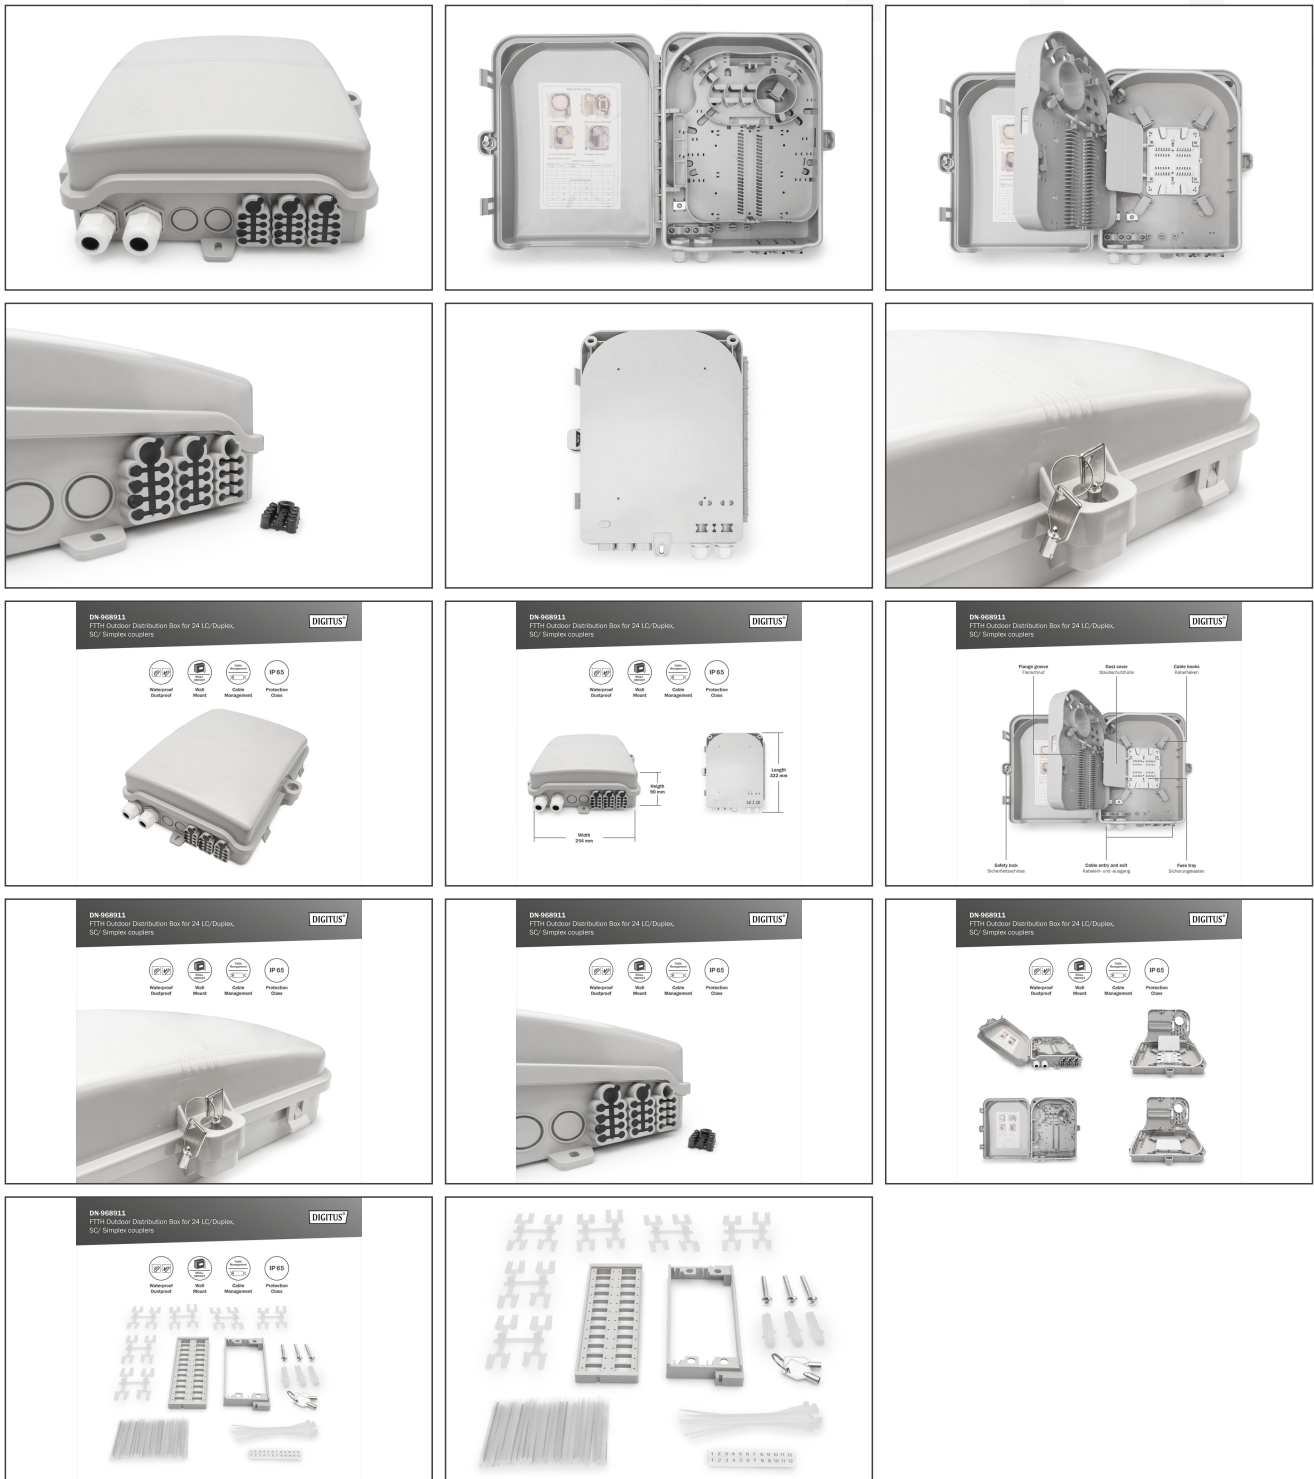

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes.
- Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.

-
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
 - Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com