


## DIGITUS®

DK-1644-020/BL-OD

EAN 4016032371342

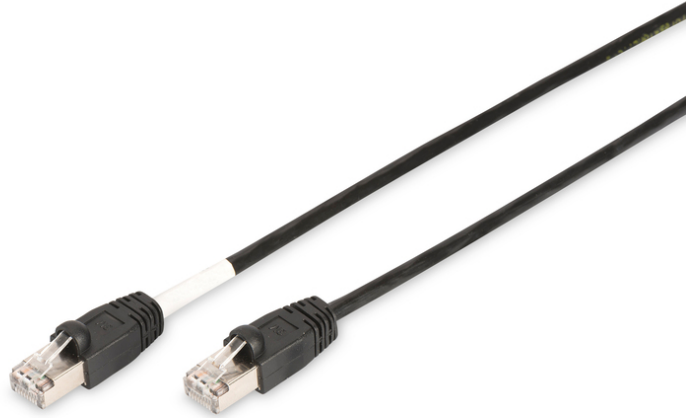

### CAT 6 S-FTP outdoor patch cord, Cu, PE AWG 27/7, length 2 m, black sheath color

Digitus® CAT 6 S-FTP outdoor patch cord, Cu, PE AWG 27/7, length 2 m, black sheath color. This is a high-quality outdoor-rated patch cord. It features a 2m length and is constructed with 4 x 2 AWG 27/7 twisted pair copper conductors. The cable is shielded with an aluminum foil and braided shield, providing excellent protection against electromagnetic interference (EMI) and radio frequency interference (RFI). The cable is jacketed with a durable, weather-resistant polyethylene (PE) sheath. Both ends of the cable are terminated with modular RJ45 (8P8C) connectors. The connectors are made of high-quality plastic and are designed for easy installation. The cable is suitable for use in outdoor environments, including in harsh weather conditions. The operating temperature range is from -20 °C to +60 °C. The cable is packaged in a polybag for protection during transport and storage.




- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1

- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Length: 2 m
- Color: black
- Jacket: PE
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

### Attributes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	8.00	40.00	31.00	30.00	37,200.00
Packaging Unit Inside	10	0.67	14.00	30.00	36.00	15,120.00
Packaging Unit Single	1	0.07	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.07	200.00	1.20	1.30	0.00

**More images:**

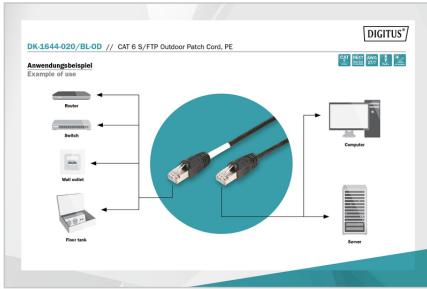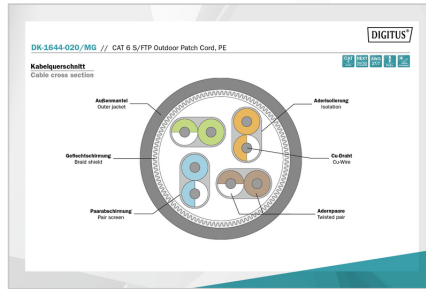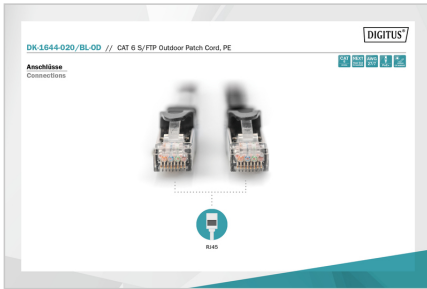

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)