


DIGITUS®

DK-1644-030/BL-OD

EAN 4016032371359

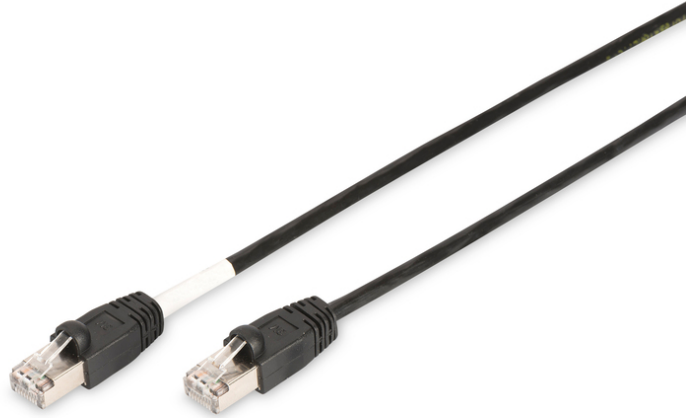

CAT 6 S-FTP outdoor patch cord, Cu, PE AWG 27/7, length 3 m, black sheath color

Digitus® CAT 6 S-FTP outdoor patch cord, Cu, PE AWG 27/7, length 3 m, black sheath color. This is a 3m long, black, outdoor-rated patch cord. It features two RJ45 (8P8C) modular plugs. The cable is constructed with 4 x 2 AWG 27/7 twisted pair conductors. The sheath is made of PE (Polyethylene). The cable is suitable for use in temperatures ranging from -20 °C to +60 °C. The product is packaged in a Digitus Polybag.

- 2 RJ45 (8P8C)
- 3m length, black sheath color
- 4 x 2 AWG 27/7 twisted pair
- Material: Cu (Cu)
- Temperature range: -20 °C to +60 °C
- PE sheath



Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1

- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Length: 3 m
- Color: black
- Jacket: PE
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	9.10	46.00	33.00	29.00	44,022.00
Packaging Unit Inside	10	0.91	34.00	18.00	8.00	4,896.00
Packaging Unit Single	1	0.09	17.00	16.00	2.50	680.00
Net single without Packaging	1	0.08	300.00	1.20	1.30	0.00

More images:

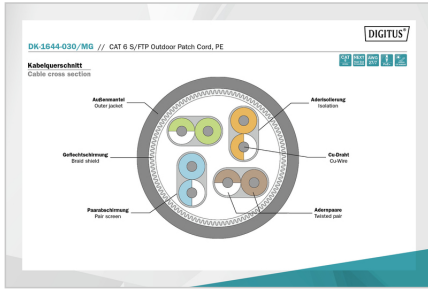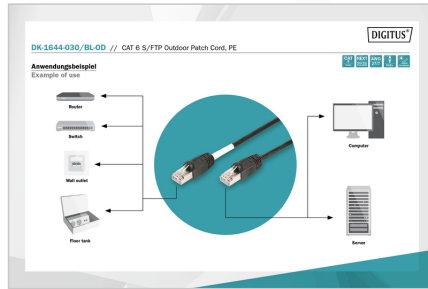

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com