


# DIGITUS® CAT 7 S/FTP data cable - installation cable, 500 m, duplex, Dca-s2, d1, a1

DK-1743-VH-D-5

EAN 4016032380573

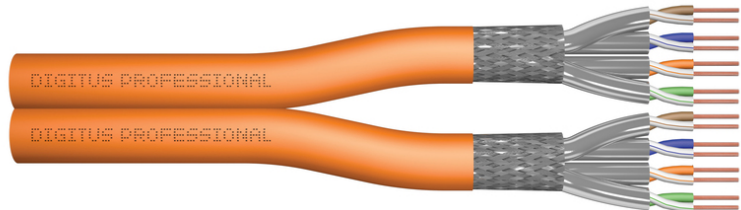

## CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 500m drum, Dx, orange

The Digitus Cat 7 installation cable is designed for use in structured data centers and building cabling in accordance with ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is ideal for the transmission of analog and digital data and supports PoE, PoE+, 4PPoE (IEEE 802.3af;3at;3bt). The shield structure consists of individually shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Dca-s2 d1 a1 acc. to EN 50575; LSZH
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 135N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C

- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45pF/m nom. at 1KHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosivity: EN 60754-1/2 (LSOH)
- Smoke density EN 61034-2

### Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 7
- Oklop: S-FTP, oklop parova u metalnoj foliji i pletenica
- CPR: Dca
- Duljina: 500 m
- Boja: narančasti
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

| Logistics                    |              |             |            |            |             |            |
|------------------------------|--------------|-------------|------------|------------|-------------|------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³        |
| Packaging Unit Carton        | 1            | 54.50       | 55.00      | 55.00      | 38.00       | 114,950.00 |
| Packaging Unit Inside        | 1            | 54.50       | 55.00      | 55.00      | 35.00       | 105,875.00 |
| Packaging Unit Single        | 1            | 54.50       | 55.00      | 55.00      | 38.00       | 114,950.00 |
| Net single without Packaging | 1            | 54.50       | 0.00       | 0.00       | 0.00        | 0.00       |

