DIGITUS® CAT 7A S/FTP, Data Cable - Installation Cable, 500 m, Duplex, Dca-s1a d1 a1, GHMT PVP Certified

DK-1743-A-VH-D-5

EAN 4016032380610

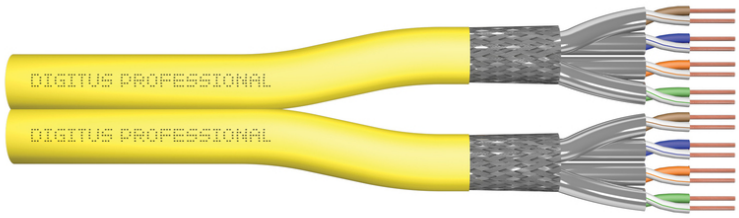

CAT 7A S-FTP installation cable, 1500 MHz Dca (EN 50575), AWG 22/1, 500 m drum, dx, yellow

The Digitus CAT 7A installation cable is designed for use in structured data centers and building cabling systems in accordance with ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is ideally suited for the transmission of analog and digital data and supports PoE, PoE+, and 4PPoE (IEEE 802.3af; 3at; 3bt). The shielding structure consists of individually shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical performance.

Future-oriented standards and high-end quality for your network.

- Physical Properties:
- Conductor: Bare copper wire, AWG 22/1
- System(s) for evaluating and verifying performance consistency: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Shielding of individual pairs: aluminum-laminated polyester film, providing 100% coverage
- Overall shielding: copper braid
- Outer jacket: Halogen-free (FRNC-C/LSZH-3)
- Outer jacket thickness: 0.6 mm nominal
- Color: Yellow (RAL 1016)
- Length: 500 m
- Mechanical Properties:
- Tensile load: 150 N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 to +50°C
- Outer diameter: 8.0 mm nominal
- Flame resistance: IEC 60332-3-24
- Halogen-Free & Smoke Density: IEC 60754-2 & IEC 61034
- Fire load: 700 Mj/km
- Weight: 70 kg/km
- Electrical Properties:
- Average impedance: 100±5 ohms at 1–600 MHz
- Capacitance: 40 pF/m nominal @ 1 kHz
- Capacitance asymmetry (pair-to-ground): 1.6 pF/m max. @ 1 kHz
- Insulation resistance: 5 GOhm x km min.
- Loop resistance: 147 ohms/km max. (2% max. resistance imbalance)
- Operating voltage: 72 Vdc max.
- Coupling damping: Grade 1 (CA Type 1b)
- Propagation delay: 10 nS/100 m max.
- Phase delay: 450 nS/100 m max.
- Containment Class: “d” per EN 50174-2
- NVP: 74%
- Flame propagation: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosivity: EN 60754-1/2 (LSOH)
- Smoke tightness: EN 61034-2

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 7A
- Oklop: S-FTP, oklop parova u metalnoj foliji i pletenica
- CPR: Dca
- Duljina: 500 m
- Boja: žuti
- Kapica: LSOH
- Struktura: 4 x 2 AWG 22/1, kruto upletena parica

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	65.00	55.00	55.00	45.00	136,125.00
Packaging Unit Inside	1	65.00	50.00	53.00	53.00	140,450.00
Packaging Unit Single	1	65.00	55.00	55.00	45.00	136,125.00
Net single without Packaging	1	65.00	0.00	0.00	0.00	0.00

More images:

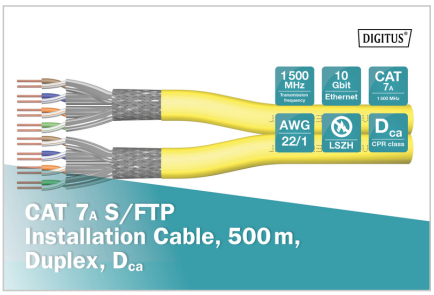

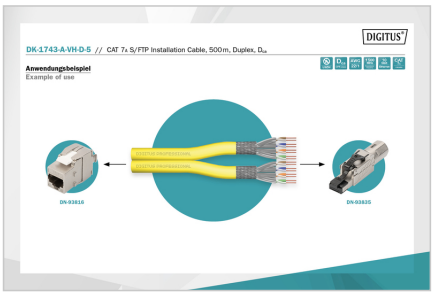

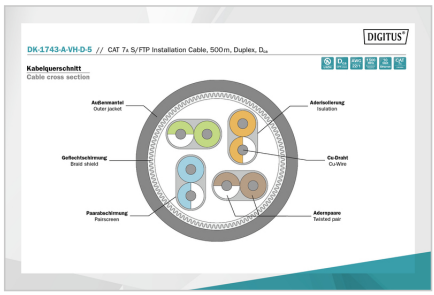

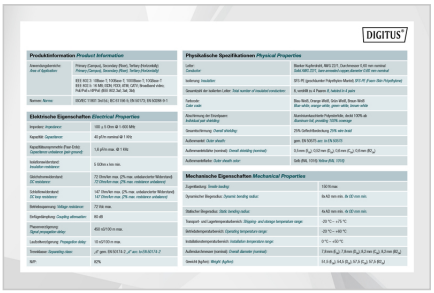

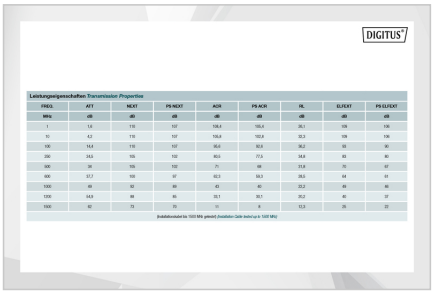

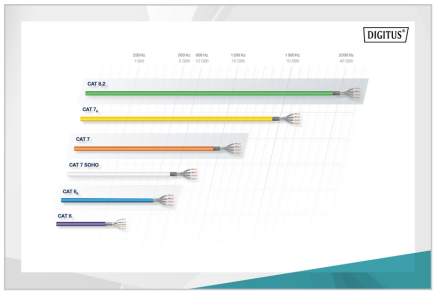

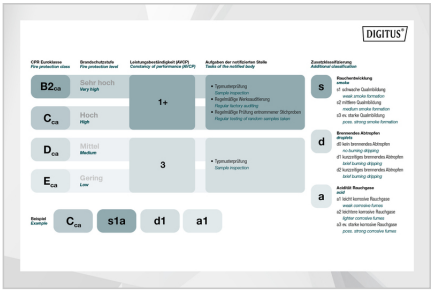



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com