


# DIGITUS® Cabo de ligação USB-C, USB-A - USB-C

DB-300136-010-S

EAN 4016032383772

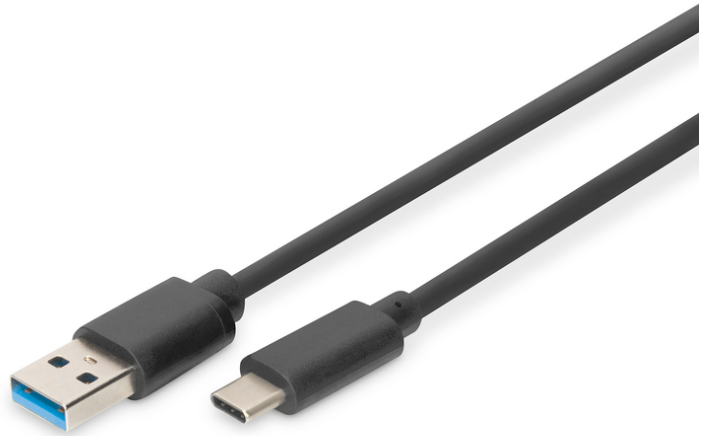

## Cabo de ligação USB tipo C, tipo C - A St/St, 1.0m, 3A, 5GB, 3.0, bw

Para ligar dispositivos finais USB externos (com tomada C, por exemplo, tablet ou smartphone) ao anfitrião USB (por exemplo, PC, computador portátil ou hub USB). Taxa de transferência até 5 Gbps (supervelocidade 10x mais rápida do que o USB 2.0). Suporta alimentação até 3A com funcionalidades USB 3.0. Suporta PD (especificações Power Delivery).

### Para sincronização e carregamento super-rápidos

- Transferências de dados a alta velocidade até 5 Gbit/s - 10 vezes mais rápido do que o USB 2.0
- Suporta uma fonte de alimentação até 3A
- Suporta a especificação USB PD (fornecimento de energia) com 60W (20V/3A)
- A ficha tipo C pode ser utilizada em ambos os lados
- Retrocompatível com USB 2.0 e 1.1


### Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB A, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1m
- Shielding: Double shielding
- USB-C Products: yes

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	80	11.20	24.00	16.00	28.00	10,752.00
Packaging Unit Inside	20	2.80	23.50	7.50	2.30	405.38
Packaging Unit Single	1	0.14	9.00	9.00	1.50	121.50
Net single without Packaging	1	0.11	0.00	0.00	0.00	0.00

**More images:**

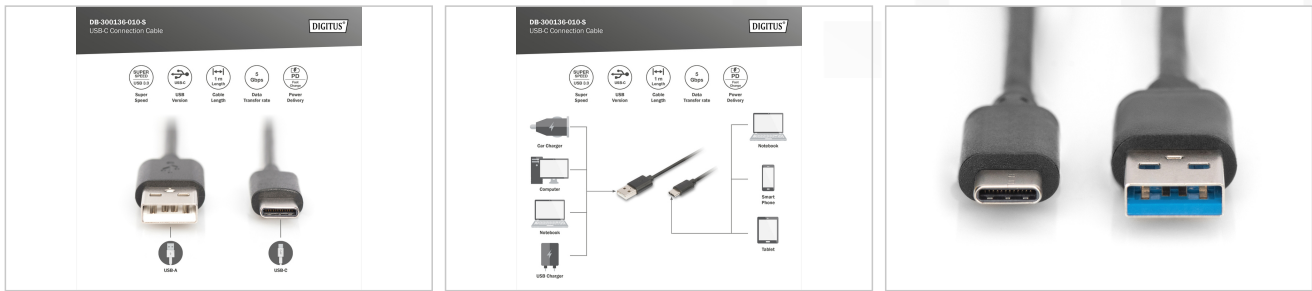

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)