


# DIGITUS Audio Extension Cable, 3.5 mm stereo

DB-510200-015-S  
EAN 4016032384014

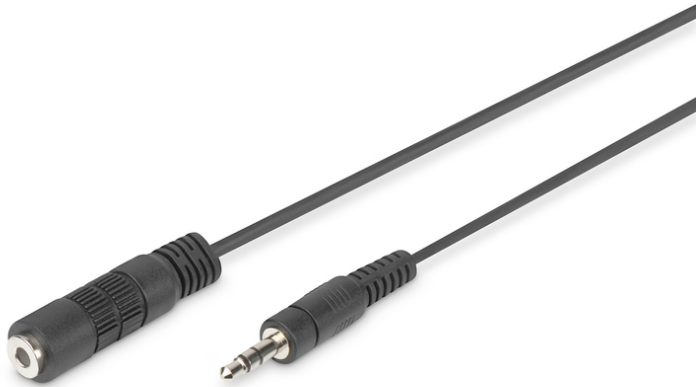

**Audio extension cable, stereo 3.5mm M/F, 1.50m, 2x0.10/10, bl**

The stereo audio cable enables the connection of all audio devices with a 3-pole 3.5 mm jack plug. Ideal for headphones, amplifiers, stereo systems, home cinema applications or notebooks. The sturdy cable sheath and nickel-plated contact surface ensure durability and top sound quality.


**Stereo audio cable to extend 3.5 mm headphone or speaker cables**


**Attributes**

- Assortment: Audio Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 3.5mm stereo jack
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CCS
- Length: 1.5 m
- Shielding: Unshielded

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 80           | 4.80        | 52.00      | 29.00      | 39.00       | 58,812.00 |
| Packaging Unit Inside        | 20           | 1.20        | 27.00      | 27.00      | 17.00       | 12,393.00 |
| Packaging Unit Single        | 1            | 0.06        | 2.00       | 8.00       | 24.00       | 384.00    |
| Net single without Packaging | 1            | 0.00        | 0.00       | 0.00       | 0.00        | 0.00      |

**More images:**

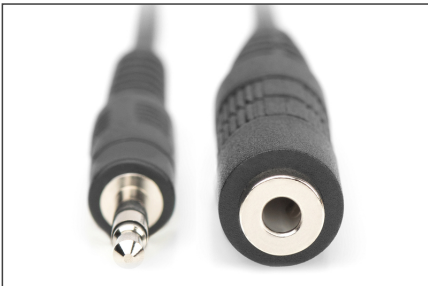

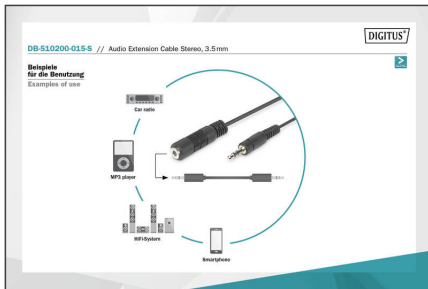

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)