

# DIGITUS® CAT 6, U-UTP patch cord, Cu, LSZH AWG 26/7, length 3 m, color red

DK-1617-030/R  
EAN 4016032387862



## CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 3 m, color red

DIGITUS® CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 3 m, color red. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a red jacket and is made of copper (Cu) conductors. The patch cord is 3 meters long and has RJ45 (8P8C) connectors on both ends. The conductors are twisted pair (4 x 2 AWG 26/7) and are unshielded (U-UTP). The patch cord is made of LSZH (Low Smoke Zero Halogen) material. The patch cord is packaged in a clear plastic bag.

- 2 RJ45 (8P8C)
- LSZH (Low Smoke Zero Halogen)
- Copper (Cu) conductors
- Shielding: U-UTP, unshielded





### Attributes

- Assortment: Twisted Pair Patch Cables

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Dielectric Polybag
- Category: CAT 6
- Shielding: U-UTP, unshielded
- Length: 3 m
- Color: red
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	11.00	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	10	0.92	15.00	30.00	36.00	16,200.00
Packaging Unit Single	1	0.09	1.60	17.00	25.00	680.00
Net single without Packaging	1	0.08	300.00	1.20	1.30	0.00

**More images:**

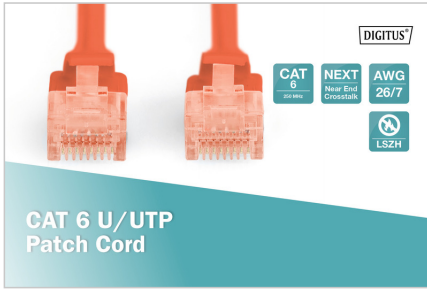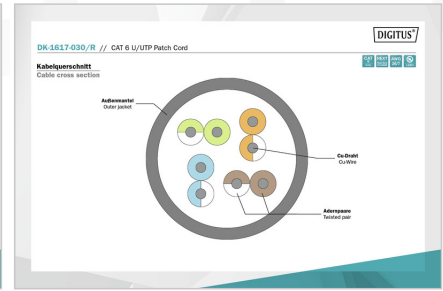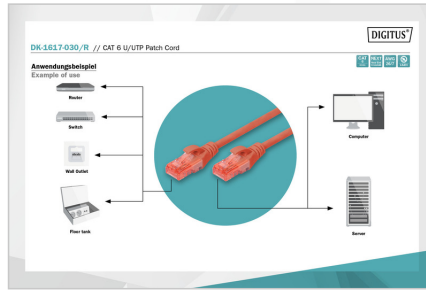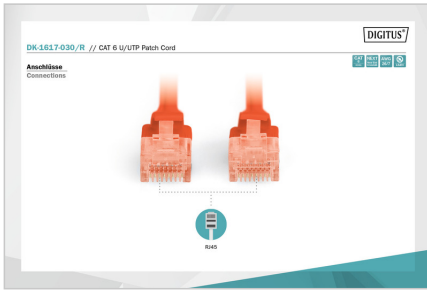

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)