


DIGITUS® CAT 6, U-UTP patch cord, Cu, LSZH AWG 26/7, length 25 m, color grey

DK-1617-250
EAN 4016032388241

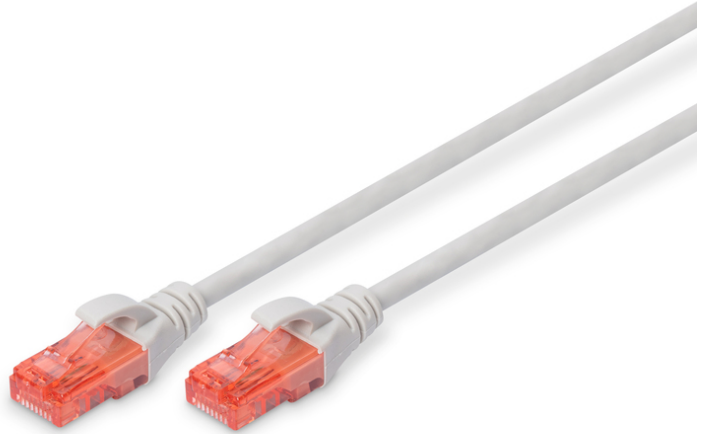

CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 25 m, color grey

DIGITUS® CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 25 m, color grey. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a 25m length and is available in a grey color. The patch cord is made of copper (Cu) and is unshielded (U-UTP). The conductors are twisted pair (4 x 2 AWG 26/7) and are protected by a LSZH jacket. The patch cord is available in a 1:1 configuration and is suitable for use in a variety of applications.



- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, halogen-free
- 25m length
- Color: grey
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Package: Digi IT Solutions
- Category: CAT 6
- Shielding: U-UTP, unshielded
- Length: 25 m
- Color: grey
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Attributes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	13.60	40.00	30.00	30.00	36,000.00
Packaging Unit Inside	1	0.68	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.68	4.34	23.00	32.00	3,194.24
Net single without Packaging	1	0.58	2,500.00	1.20	1.30	0.00

More images:

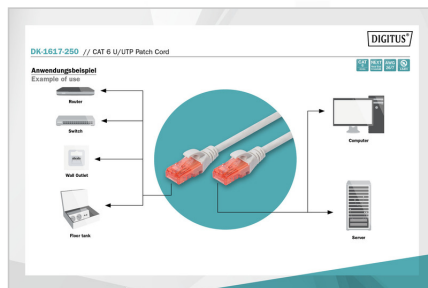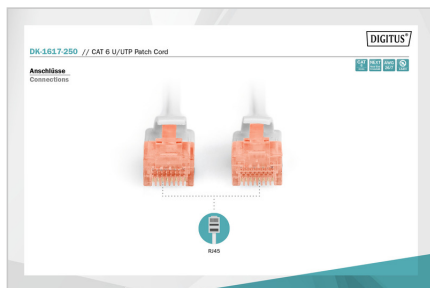

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com