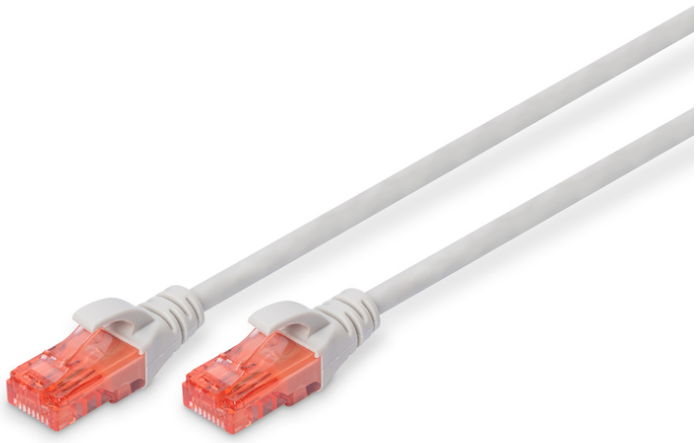
# DIGITUS® □□□□□□□□□□□□□□□□ □□□□□□ □ □□□□□ □□□□□ CAT 6,

**DK-1617-300**

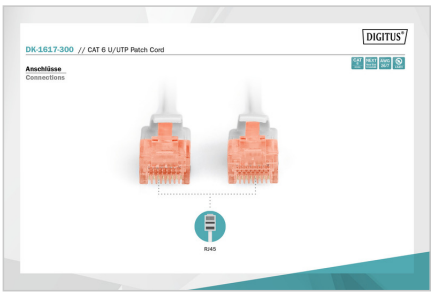
**EAN 4016032388319**

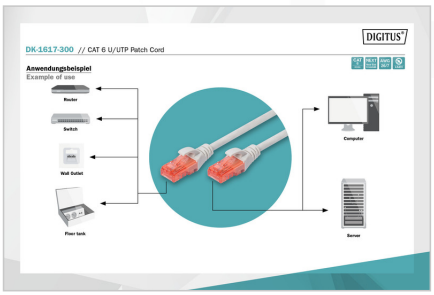


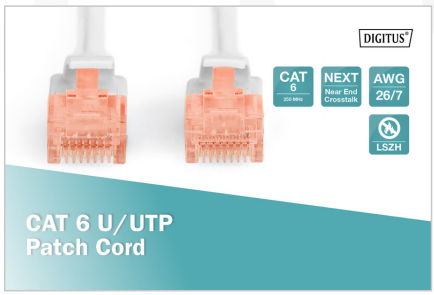
**CAT 6 U-UTP patch cord, Cu, LSZH AWG 26/7, length 30 m, color grey**

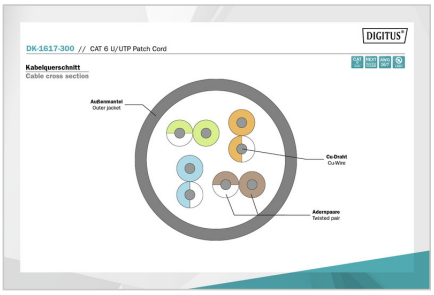
□□□□□□□□□□□□□□□□ □□□□□□□ DIGITUS® □□□□□□□□□□ 6 □□□□□□□ E □□□□□□□□ □□□□□□ □ □□□□□□□□□□□□□□ □ □□□□□□□□□□□□□□ ISO/IEC 11801 □ □□□□□□ DIGITUS® CAT 6. □□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□ □□ 250 □□□, □□□□□□□□ □□□□□ □□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□, □□□□ □□□□□□□□□ □□□□□□□□□□□□□□ □□□□□□□□□□□□□ □□□□□□ □□ □□□□□□□□□. □□□□□□□□□ □□□□□□□□□□□□□□□□□□□□

**More images:**




**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com