DIGITUS® □□□□□□ □□□□□□ SFP 1,25 □□□□/□, RJ45

DN-81005

EAN 4016032389484



1.25 Gbps Copper SFP Module, RJ45 10/100/1000Base-T, up to 100m

□□□□□□□ □□□□□□□□□□□□□ DIGITUS® Mini GBIC (SFP) □□□□□□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□ □ □□□□□□□□□□□□. □□□□□□□ □□□□□□□□□□ □□□□□□□□□ □□□□□□□ □□□□ □□□ (□□□□□□□□ □□□□□□□□□□□□) □□□□□□□□□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□□ □ □□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□□□□□□□□□.

□□□□□□□□□□□ Plug and Play □□□□ □□□□□□□ □□□□□□□□□ □□□□□□□□□□□□□□□□

- □□□□□□□ Mini GBIC SFP (□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□)
- □□□□□□□□□□ □ □□□□□□□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□□□□□□□□□: Allied Telesis, Alinet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik , ENTERASYS, RIVERSTONE , Unifi, Ubiquiti, ZyXEL, ZTE
- □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□ □□□□□□□□□ □□□□□□□□□ □□□□□□□ □□ 1,25 □□□□/□
- □□□□□□□□□□□□□□□ □□□□□□□□□□□□□ □□□□□□□□□□ IEEE 802.3z
- □□□□□□□□ □□□□□□□□□ □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□
- □□□□□□□□ □□□□□□□□□□ Plug and Play
- □□□□□□□□□□ □□ □□□□□□□□□□□□ MSA (□□□□□□□□ □□□□□□□□□□□□)
- □□□□□□□□□ □□□□□□□□□□ □□□□ □□□□□□□□□□ □□□□□□□□□
- □□□□ □□□□□□□□□□□□□□□: 1 □□□□□□□ □□□□□□□□□□ RJ45, CAT 5
- □□□□□□□□□□□□□: □□□ 100 □
- □□□□□□□□ □□□□□□□□□□□□□□□: 0-70 °C

Attributes

- Mode: Copper
- Connector: RJ45
- Distance (km): 0.1
- DDM Support: no
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: Gigabit

Package contents

- □□□□□□□ SFP


Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.00	25.40	39.40	55.00	55,041.80
Packaging Unit Inside	30	1.75	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.06	3.20	9.30	12.00	357.12
Net single without Packaging	1	0.02	1.50	1.50	7.00	0.00

More images:





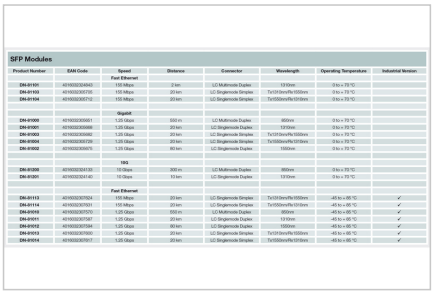

SFP Modules

Product Number	EAN Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
		Fast Ethernet					
DN-81101	4016032324043	100 Mbps	2 km	LC Multimode Duplex	1310nm	0 to + 70 °C	
DN-81103	4016032307735	100 Mbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	0 to + 70 °C	
DN-81104	4016032307742	100 Mbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	0 to + 70 °C	
		Gigabit					
DN-81000	4016032305011	1.25 Gbps	550 m	LC Multimode Duplex	850nm	0 to + 70 °C	
DN-81001	4016032305998	1.25 Gbps	20 km	LC Singlemode Duplex	1310nm	0 to + 70 °C	
DN-81003	4016032305982	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	0 to + 70 °C	
DN-81004	4016032305128	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	0 to + 70 °C	
DN-81002	4016032305975	1.25 Gbps	80 km	LC Singlemode Duplex	1550nm	0 to + 70 °C	
		10G					
DN-81200	4016032324135	10 Gbps	300 m	LC Multimode Duplex	850nm	0 to + 70 °C	
DN-81201	4016032324140	10 Gbps	10 km	LC Singlemode Duplex	1310nm	0 to + 70 °C	
		Fast Ethernet					
DN-81113	4016032307024	100 Mbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	-40 to + 85 °C	✓
DN-81114	4016032307031	100 Mbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	-40 to + 85 °C	✓
DN-81010	4016032307970	1.25 Gbps	550 m	LC Multimode Duplex	850nm	-40 to + 85 °C	✓
DN-81011	4016032307567	1.25 Gbps	20 km	LC Singlemode Duplex	1310nm	-40 to + 85 °C	✓
DN-81012	4016032307574	1.25 Gbps	40 km	LC Singlemode Duplex	1550nm	-40 to + 85 °C	✓
DN-81013	4016032307000	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	-40 to + 85 °C	✓
DN-81014	4016032307017	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	-40 to + 85 °C	✓



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com