

# DIGITUS® USB-C 3.2 Gen2 connection cable, USB-C to USB-C

AK-300139-010-S

EAN 4016032426011



## USB Type-C connection cable, type C to C M/M, 1.0m, USB 3.2 Gen2, 5A, 10GB, 3.2 Version, bl

For connecting external USB devices (with C socket, e.g. PC, tablet or smartphone) to the USB host (e.g. PC, notebook). Data transfer rate up to 10 Gbit/s (Superspeed+).

### One cable for data exchange and charging.


- USB 3.2 Gen2 data transfer rate up to 10 Gbps, Superspeed+
- Supports power supply up to 20V/5A, 100W
- Supports the USB PD (Power delivery) specification

### Attributes

- AWG: 30
- Kabel u boji: crni
- Konektor 1: USB C, utikač
- Konektor 2: USB C, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 1 m
- oklop: dvostruki oklop

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 200          | 11.80       | 44.00      | 33.00      | 22.00       | 31,944.00       |
| Packaging Unit Inside        | 10           | 0.59        | 40.00      | 35.00      | 7.60        | 10,640.00       |
| Packaging Unit Single        | 1            | 0.06        | 25.00      | 13.50      | 1.30        | 438.75          |
| Net single without Packaging | 1            | 0.05        | 10.00      | 10.00      | 1.30        | 0.00            |

### More images:

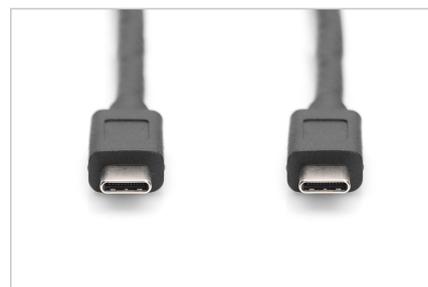



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)