

# DIGITUS® DisplayPort to HDMI Adapter Cable

AK-340415-002-S  
EAN 4016032427476



## DisplayPort adapter cable, DP - HDMI type A M/F, 0.2m, w/lock, HDMI 2.0, act., CE, gold, bl

4K DisplayPort to HDMI (DisplayPort to HDMI) adapter cable. Ultra HD 4K x 2K resolution. Supports 1080P/3D. HDTV Standard: Ultra HD 4K. Length: 0.2m. Color cable: black. Color connector: black. Connector 1: DP plug. Connector 2: HDMI type A jack. Connector surface: nickel-plated. Ferrite filter. DisplayPort standard: DisplayPort 1.2. Head: soldered. Interlock: Snap fastener. Wire material: CU. Length: 0.2m. AOC - Active Optical Cable: no. Shielding: Double shielding.

### Supports HDMI 2.0


- Supports 4K x 2K resolution
- Supports 1080P/3D
- HDTV Standard: Ultra HD 4K
- Length: 0.2m
- Color cable: black
- Color connector: black
- Connector 1: DP plug
- Connector 2: HDMI type A jack
- Connector surface: nickel-plated
- Ferrite filter
- DisplayPort standard: DisplayPort 1.2
- Head: soldered
- Interlock: Snap fastener
- Wire material: CU
- Length: 0.2m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

### Attributes

- AWG: 32

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	8.00	38.10	30.20	24.10	27,729.90
Packaging Unit Inside	10	0.40	33.00	27.90	7.60	6,997.32
Packaging Unit Single	1	0.04	20.00	15.00	1.52	456.00
Net single without Packaging	1	0.03	25.20	3.50	1.40	0.00

**More images:**

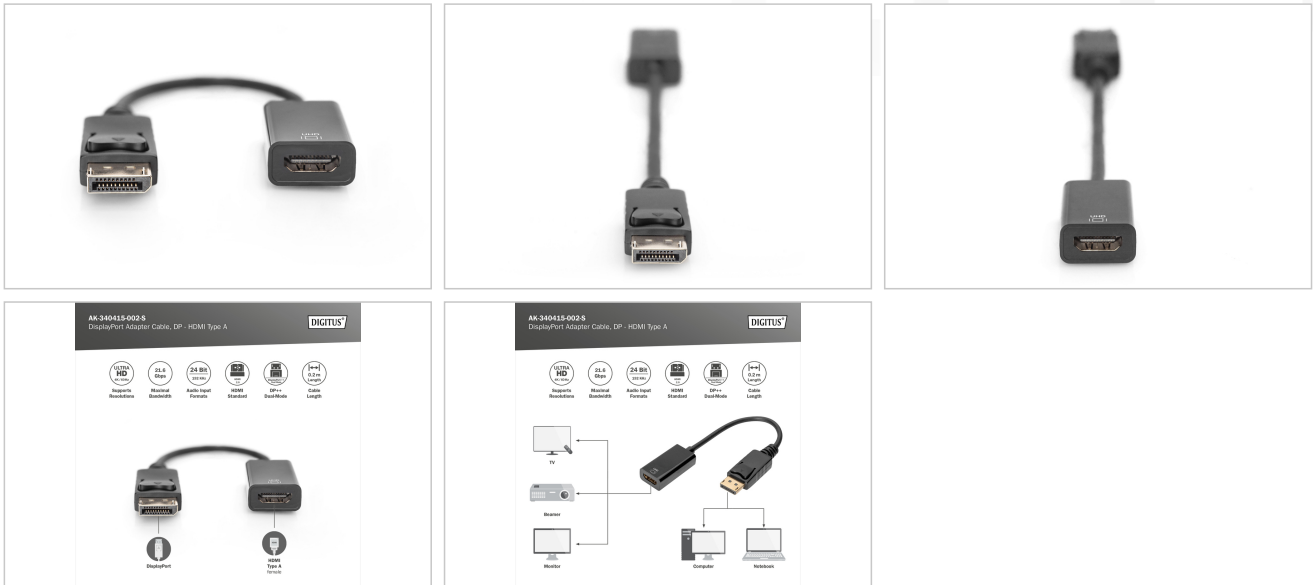

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)