

# DIGITUS® Adaptador / conversor ativo de Mini DisplayPort para HDMI

AK-340416-002-W

EAN 4016032427490



## Cabo adaptador DisplayPort, tipo mini DP - HDMI A St/Bu, 0,2m, HDMI 2.0, ativo, dourado, branco

O adaptador/conversor 4K Mini DisplayPort para HDMI (ficha Mini DisplayPort para tomada HDMI) permite-lhe apresentar conteúdos do seu computador ou portátil diretamente no seu televisor. Suporta uma resolução de até 4096 x 2160, permitindo-lhe visualizar as suas imagens, vídeos, documentos, apresentações, etc. em Ultra HD e é ideal para utilização em reuniões ou em casa.

### Suporte de funcionalidades HDMI 2.0

- Integra um recetor DisplayPort completo e um transmissor HDMI completo para chamadas de vídeo
- Transmissor HDMI2.0 integrado, suporta até 4K x 2K@60Hz, 4K x 2K@30Hz e vídeos 1080P/3D
- Suporta o modo duplo DP++
- Suporta DisplayPort 1.2 e 4 pistas com 1,62 Gbit/s, 2,7 Gbit/s e 5,4 Gbit/s
- Suporte completo para proteção de conteúdos HDCP 1.4/2.2.
- Deep Colour 24bit

- Formatos de entrada de áudio: LPCM de 8 canais, áudio comprimido (AC-3, DTS) e formato de áudio HBR com um tamanho de amostra de áudio até 24 bits e uma velocidade de fotogramas de 192 kHz


### Attributes

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	6.70	38.10	30.20	24.10	27,729.90
Packaging Unit Inside	10	0.34	33.00	27.90	7.60	6,997.32
Packaging Unit Single	1	0.03	20.00	15.00	1.52	456.00
Net single without Packaging	1	0.03	23.20	3.50	1.40	0.00

**More images:**

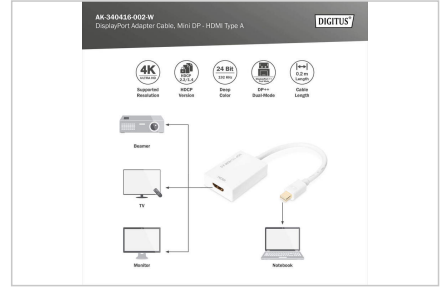

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)