

DIGITUS® Conector CAT 6A CAT (acoplamento para aplicações no terreno), 500 MHz

DN-93909

EAN 4016032431268



Acoplamento para aplicação no terreno CAT 6A, 500 MHz para AWG 22-26, blindado, design keystone, 26x35x80

O acoplador DIGITUS Professional para aplicações no terreno é utilizado para ligar ou prolongar cabos de par entrançado.

- Características de transmissão: Categoria 6A, classe EA
- Áreas de aplicação: Até 500 MHz, 10GBase-T
- Adequado para cabos AWG 22-26 médios
- Caixa: Liga de zinco


- Contactos: Niquelados
- blindado
- Design Keystone
- Atribuição: 1:1
- Temperatura de funcionamento: -10 °C a +60 °C


Attributes

- Category: CAT 6A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	300	12.70	31.30	23.40	53.50	39,184.50
Packaging Unit Inside	30	1.27	8.00	3.50	2.60	72.80
Packaging Unit Single	1	0.04	9.00	8.00	3.00	216.00
Net single without Packaging	1	0.04	9.00	8.00	3.00	0.00

More images:

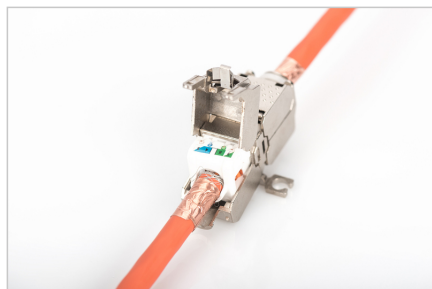

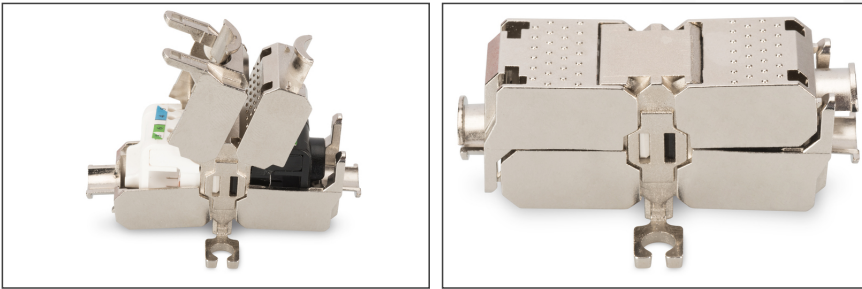

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com