

# DIGITUS® 19" Rackmountable PDU, 8x CEE 7/3 outlets, 2m

DN-95412  
EAN 4016032431770



### Aluminium PDU, Rackmountable, frequency filter 16A, 4000W, 250VAC 50/60Hz, 7x safety outlet, 2m

Digitus® – 19" Rackmountable PDU, 8x CEE 7/3 outlets, 2m. Additional Features: Line filter, Overvoltage protection. Power: 3,6 kVA. Volts: 230 V. Installation: Rack OU, Desktop. Outlets: CEE 7/3. Phase: 1ph.

19-Rackmountable PDU, 8x CEE 7/3 outlets, 2m

- 7 outlets 250V 50/60 / 16A / 4000W
- Frequency filter
- 2 safety outlets
- H05VV-F 35mm<sup>2</sup> 1,5mm<sup>2</sup> (2) safety outlets
- Safety outlet UL-94V-0
- Safety outlet
- Safety outlet, safety outlet 35°

### Attributes



- Additional Features: Line filter, Overvoltage protection
- Power: 3,6 kVA
- Volts: 230 V

### Package contents

- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	14.48	76.50	16.50	31.50	39,760.90
Packaging Unit Inside	1	1.45	75.50	12.50	6.50	6,134.38
Packaging Unit Single	1	1.45	75.50	12.50	6.50	6,134.38
Net single without Packaging	1	0.00	4.50	62.00	4.50	0.00

**More images:**

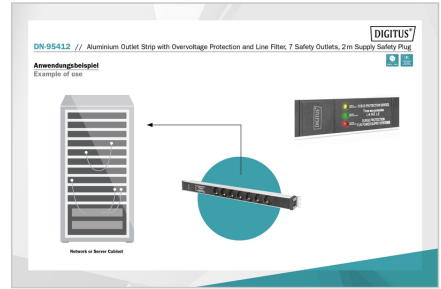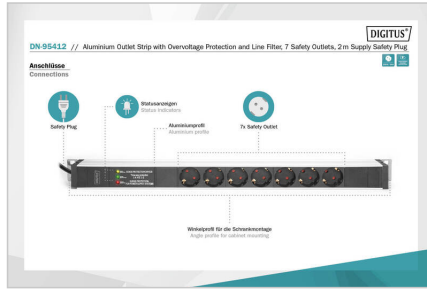

**Safety notes**

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)