DIGITUS® □□□□□□□□□ □□□□□□□□□ DisplayPort 3 □ 1

AK-340418-002-S

EAN 4016032433781



DisplayPort converter cable, DP - HDMI+DVI+VGA M-F/F/F, 0.2m, 3in1 Multi-Media cable, CE, gold,bl

□□□□□□□ □□□□□□□□ □□□□□□□□□□ □□□□□□□□□□□□ □□□□ □□□□□□□□□□ □□□□ □□□□□□□□ □ □□□□□□□□□□□□□ DisplayPort □ □□□□□□□ □□□□□□□□□ □ □□□□□□□□□□□□ HDMI, VGA □□

□□ □□□□□□□□□□ □□□□□□□□□□□□□ 3 □□□□□□□□□□ □□□□□□□□□.

- □□□□□□□□□□□□□ □□□□□□□□□ DisplayPort □ □□□□□□□□ HDMI, DVI □ VGA
- □□□□□: 1 □□□□□□□ DisplayPort; □□□□□□: 1□□□□□□□ HDMI & 1x DVI & 1x VGA
- □□□□□□□□□□□□□ 4K/2K □□□□ 30 □□
- DispayPort 1.2 □□□□□□□□□ □□□□□□□□□ □□□□□□□ □□ 5,4 □□□□□/□
- HDMI 1.4 □□□□□□□□□ □□□□□□□□□ □□□□□□□ □□ 3 □□□□□/□
- □□□□□□□□□□□□ DVI&VGA □□□□□□□□□□□□□□□ Full HD 1080P@ 60 □□
- □□□□□□□□□□□□ VGA □□ WUXGA 1920 x 1200 dpi (□□□□ □□□□□□□□□□ □□□□□□□□ □□□□□□□□□□ □□□□□)
- □□□□□□□□□□□ □□□□□□□□□□□□□ Plug and Play
- □□□□ □□□□□□□□□□□□□□□ □ □□□□□□ □□□□□□□□

Attributes

- Assortment: DisplayPort Cables
- AWG: 28/30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding


Package contents

- DisplayPort 3in1 adapter / converter, DP - HDMI+DVI+VGA

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	7.20	50.00	21.00	32.00	33,600.00
Packaging Unit Inside	10	0.72	15.00	20.00	7.00	2,100.00
Packaging Unit Single	1	0.07	18.00	14.00	2.00	504.00
Net single without Packaging	1	0.05	28.50	4.00	1.60	0.00

More images:

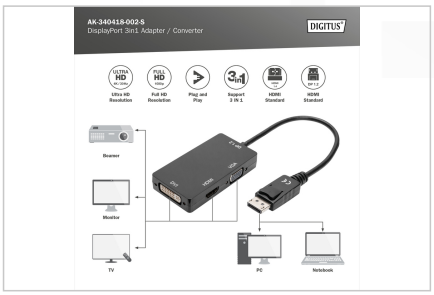



Safety notes

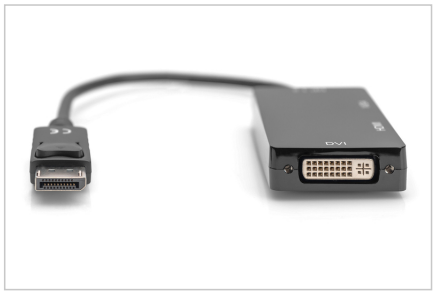- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com