

# DIGITUS® DisplayPort 3 in 1

AK-340418-002-S  
EAN 4016032433781



**DisplayPort converter cable, DP - HDMI+DVI+VGA M-F/F/F, 0.2m, 3in1 Multi-Media cable, CE, gold,bl**

3 in 1 DisplayPort 1.2 Adapter Cable, DP to HDMI, DVI, VGA, 0.2m, 3 in 1, Multi-Media Cable, CE, Gold Plated, Black

- 3 in 1 DisplayPort 1.2 Adapter Cable, DP to HDMI, DVI, VGA
- 3 in 1: 1 x DisplayPort; 1 x HDMI & 1 x DVI & 1 x VGA
- 4K/2K 30 FPS
- DisplayPort 1.2 5.4 Gbps
- HDMI 1.4 3 Gbps
- DVI & VGA Full HD 1080P@60 FPS
- WUXGA 1920 x 1200 dpi
- Plug and Play
- 28/30 AWG

**Attributes**

- Assortment: DisplayPort Cables
- AWG: 28/30


- Color cable: black
- Color connector: black
- Connector 1: DP plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

**Package contents**

- DisplayPort 3in1 adapter / converter, DP - HDMI+DVI+VGA

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	7.20	50.00	21.00	32.00	33,600.00
Packaging Unit Inside	10	0.72	15.00	20.00	7.00	2,100.00
Packaging Unit Single	1	0.07	18.00	14.00	2.00	504.00
Net single without Packaging	1	0.05	28.50	4.00	1.60	0.00

**More images:**

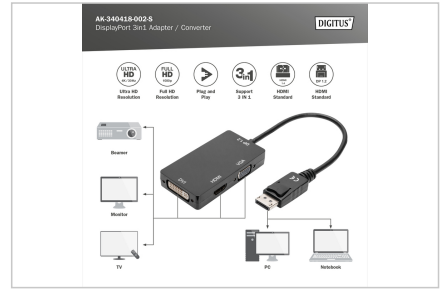

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)